(19) World Intellectual Property Organization International Bureau



(43) International Publication Date 16 January 2003 (16.01.2003)

PCT

(10) International Publication Number WO 03/004001 A1

(51) International Patent Classification⁷: 9/20, B01J 2/16

A61K 9/16,

(21) International Application Number: PCT/DK02/00472

(22) International Filing Date: 5 July 2002 (05.07.2002)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: PA 2001 01071

6 July 2001 (06.07.2001) DK


- (71) Applicant (for all designated States except US): PHAROTECH A/S [DK/DK]; Ottiliavej 9, DK-2500 Valby (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HOLM, Per [DK/DK]; Grøndals Parkvej 54, DK-2720 Vanløse (DK). BUUR, Anders [DK/DK]; Lille Blovstrødvej 18, DK-3450 Allerød (DK). ELEMA, Michiel, Onne

[NL/DK]; Victor Bendix Gade 11, DK-2100 Copenhagen (DK). MØLLGAARD, Birgitte [DK/DK]; Bakkevej 11, DK-2830 Virum (DK). HOLM, Jannie, Egeskov [DK/DK]; Daemningen 51, DK-2500 Valby (DK). SCHULTZ, Kirsten [DK/DK]; Nørregade 25A, Tune, DK-4000 Roskilde (DK).

- (74) Agent: ALBIHNS A/S; H.C. Andersens Boulevard 49, DK-1553 Copenhagen V (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: CONTROLLED AGGLOMERATION

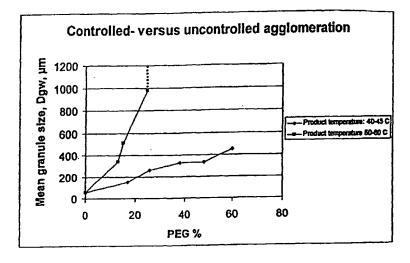

(57) Abstract: A process for the preparation of a particulate material by a controlled agglomeration method, i.e. a method that enables a controlled growth in particle size. The method is especially suitable for use in the preparation of pharmaceutical compositions containing a therapeutically and/or prophylactically active substance which has a relatively low aqueous solubility and/or which is subject to chemical decomposition. The process comprising i) spraying a first composition comprising a carrier, which has a melting point of about 5°C or more which is present in the first composition in liquid form, on a second composition comprising a material in solid form, the second composition having a temperature of at the most a temperature corresponding to the melting point of the carrier and/or the carrier composition and ii) mixing or others means of mechanical working the second composition onto which the first composition is sprayed to obtain the particulate material.

VO 03/004001 A

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, Cl, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

 before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTROLLED AGGLOMERATION

Field of the invention

- 5 The present invention relates to a process for the preparation of a particulate material by a controlled agglomeration method, i.e. a method that enables a controlled growth in particle size. The method is especially suitable for use in the preparation of pharmaceutical compositions containing a therapeutically and/or prophylactically active substance which has a relatively low aqueous solubility and/or which is subject to chemical decomposition. By employment of the novel process, compositions can be prepared that have improved properties with respect to release of the active substance from the composition as evidenced by *in vitro* dissolution test and/or with respect to improved shelf life of the compositions upon storage.
- The invention also relates to a particulate material obtained by the novel process and to pharmaceutical compositions containing such particulate material. The particulate material obtained exhibits excellent flowability and compactability and possess excellent tabletting properties.

20 Background of the invention

There is a need for developing new and improved methods which enable preparation of pharmaceutical compositions for oral use that release the active substance from the composition in a suitable manner to enable an absorption of the active substance into the circulatory system.

Detailed disclosure of the invention

The present invention provides a method for controlled agglomeration, i.e. a controlled growth in particle size of a particulate material. Controlled agglomeration is provided using a process for the preparation of a particulate material (see below).

The invention also provides a process for the preparation of a particulate material, the process comprising

25

30

10

15

20

25

- spraying a first composition comprising a carrier, which has a melting point of about 5 °C or more such as, e.g., about 10 °C or more, about 20°C or more or about 25 °C or more and which is present in the first composition in liquid form, on a second composition comprising a material in solid form, the second composition having a temperature of at the most a temperature corresponding to the melting point of the carrier and/or of the carrier composition such as, e.g., a temperature of at least about 2 °C, at least about 5 °C or at least about 10 °C lower than the melting point of the carrier and/or of the carrier composition, and
- ii) mixing or other means of mechanical working the second composition onto which the first composition is sprayed to obtain the particulate material.
- The process enables incorporation in a solid material of a high load of a carrier of a type that e.g. due to its solubility properties enables a high load of therapeutically and/or prophylactically active substances with a relatively low aqueous solubility. The carrier is normally solid or semi-solid and normally it has a sticky, oily or waxy character. However, the carrier may also be fluid at room temperature or even at temperature below 5 °C and in such cases it is contemplated that the process is carried out by employment of cooling of the second composition. By employment of the novel controlled agglomeration method a particulate material with a high load of carrier may be prepared and the resulting particulate material appears as a particulate powder in solid form. The particulate material obtained by the novel method has excellent properties with respect to flowability, bulk density, compactability and thus, it is suitable for use in the preparation of e.g. tablets. Although the particulate material may have a high load of a carrier of substantially sticky character the particulate material prepared has minimal, if any, adherence to tablet punches and/or dies during manufacture of tablets.

30

Methods for the preparation of granular products are described e.g. in EP-A-0 306 465 (Lejus Medical Aktiebolag), JP 60184378 (Takeda) and in WO 01/22941 (H. Lundbeck A/S). However, in none of these documents is described a method for the preparation of a particulate material, which method enables incorporation of a relatively high

amount of a carrier as defined below and at the same time controlling the size of the particles obtained.

Carriers and carrier compositions

5

10

15

20

25

30

35

As indicated above an important step in the process for the preparation of a particulate material according to the invention is the addition of a carrier or a carrier composition. The carrier is of a type, which has a melting point of at least about 25 °C such as, e.g., at least about 30 °C at least about 35 °C or at least about 40 °C. For practical reasons, the melting point may not be too high, thus, the carrier normally has a melting point of at the most about 300 °C such as, e.g., at the most about 250 °C, at the most about 200 °C, at the most about 150 °C or at the most about 100 °C. If the melting point is higher then it becomes very difficult to ensure maintenance of a sufficient high temperature during the delivery of the carrier to the spraying equipment necessary to provide the melted carrier (or carrier composition) in the form of a spray. Furthermore, in those cases where e.g. a therapeutically and/or prophylactically active substance is included in the carrier composition, a relatively high temperature may promote e.g. oxidation or other kind of degradation of the substance.

- In the present context, the melting point is determined by DSC (Differential Scanning Calorimetry). The melting point is determined as the temperature at which the linear increase of the DSC curve intersect the temperature axis (see Fig. 8 for further details).
- Suitable carriers are generally substances, which are used in the manufacture of pharmaceuticals as so-called melt binders or solid solvents (in the form of solid dosage form), or as co-solvents or ingredients in pharmaceuticals for topical use.
 - The carrier may be hydrophilic, hydrophobic and/or they may have surface-active properties. In general hydrophilic and/or hydrophobic carriers are suitable for use in the manufacture of a pharmaceutical composition comprising a therapeutically and/or prophylactically active substance that has a relatively low aqueous solubility and/or when the release of the active substance from the pharmaceutical composition is designed to be immediate or non-modified. Hydrophobic carriers, on the other hand, are normally used in the manufacture of a modified release pharmaceutical

composition. The above-given considerations are simplified to illustrate general principles, but there are many cases where other combinations of carriers and other purposes are relevant and, therefore, the examples above should not in any way limit the invention.

5

10

15

20

25

30

35

Examples on a suitable carrier are a hydrophilic carrier, a hydrophobic carrier, a surfactant or mixtures thereof.

Typically, a suitable hydrophilic carrier is selected from the group consisting of: polyether glycols such as, e.g., polyethylene glycols, polypropylene glycols; polyoxyethylenes; polyoxypropylenes; poloxamers and mixtures thereof, or it may be selected from the group consisting of: xylitol, sorbitol, potassium sodium tartrate, sucrose tribehenate, glucose, rhamnose, lactitol, behenic acid, hydroquinon monomethyl ether, sodium acetate, ethyl fumarate, myristic acid, citric acid, Gelucire 50/13, other Gelucire types such as, e.g., Gelucire 44/14 etc., Gelucire 50/10, Gelucire 62/05, Sucro-ester 7, Sucro-ester 11, Sucro-ester 15, maltose, mannitol and mixtures thereof.

A hydrophobic carrier for use in a process of the invention may be selected from the group consisting of: straight chain saturated hydrocarbons, sorbitan esters, paraffins; fats and oils such as e.g., cacao butter, beef tallow, lard, polyether glycol esters; higher fatty acid such as, e.g. stearic acid, myristic acid, palmitic acid, higher alcohols such as, e.g., cetanol, stearyl alcohol, low melting point waxes such as, e.g., glyceryl monostearate, hydrogenated tallow, myristyl alcohol, stearyl alcohol, substituted and/or unsubstituted monoglycerides, substituted and/or unsubstituted diglycerides, substituted and/or unsubstituted triglycerides, yellow beeswax, white beeswax, camauba wax, castor wax, japan wax, acetylate monoglycerides; NVP polymers, PVP polymers, acrylic polymers, or a mixture thereof.

In an interesting embodiment, the carrier is a polyethylene glycol having an average molecular weight in a range of from about 400 to about 35,000 such as, e.g., from about 800 to about 35,000, from about 1,000 to about 35,000 such as, e.g., polyethylene glycol 1,000, polyethylene glycol 2,000, polyethylene glycol 3,000, polyethylene glycol 4,000, polyethylene glycol 5,000, polyethylene glycol 6000, polyethylene glycol 7,000, polyethylene glycol 8,000, polyethylene glycol 9,000

polyethylene glycol 10,000, polyethylene glycol 15,000, polyethylene glycol 20,000, or polyethylene glycol 35,000. In certain situations polyethylene glycol may be employed with a molecular weight from about 35,000 to about 100,000.

5 In another interesting embodiment, the carrier is polyethylene oxide having a molecular weight of from about 2,000 to about 7,000,000 such as, e.g. from about 2.000 to about 100,000, from about 5,000 to about 75,000, from about 10,000 to about 60,000, from about 15,000 to about 50,000, from about 20,000 to about 40,000, from about 100,000 to about 7,000,000 such as, e.g., from about 100,000 to about 1,000,000, from about 100,000 to about 600,000, from about 100,000 to about 10 400,000 or from about 100,000 to about 300,000.

15

20

25

30

35

In another embodiment, the carrier is a poloxamer such as, e.g. Poloxamer 188, Poloxamer 237, Poloxamer 338 or Poloxamer 407 or other block copolymers of ethylene oxide and propylene oxide such as the Pluronic® and/or Tetronic® series. Suitable block copolymers of the Pluronic® series include polymers having a molecular weight of about 3,000 or more such as, e.g. from about 4,000 to about 20,000 and/or a viscosity (Brookfield) from about 200 to about 4,000 cps such as, e.g., from about 250 to about 3,000 cps. Suitable examples include Pluronic® F38, P65, P68LF, P75, F77, P84, P85, F87, F88, F98, P103, P104, P105, F108, P123, F123, F127, 10R8, 17R8, 25R5, 25R8 etc. Suitable block copolymers of the Tetronic® series include polymers having a molecular weight of about 8,000 or more such as, e.g., from about 9,000 to about 35,000 and/or a viscosity (Brookfield) of from about 500 to about 45,000 cps such as, e.g., from about 600 to about 40,000. The viscosities given above are determined at 60 °C for substances that are pastes at room temperature and at 77 °C for substances that are solids at room temperature.

The carrier may also be a sorbitan ester such as, e.g., sorbitan di-isostearate, sorbitan dioleate, sorbitan monolaurate, sorbitan monoisostearate, sorbitan monooleate, sorbitan monopalmitate, sorbitan monostearate, sorbitan sesqui-isostearate, sorbitan sesquioleate, sorbitan sesquistearate, sorbitan tri-isostearate, sorbitan trioleate, sorbitan tristearate or mixtures thereof.

The carrier composition may of course comprise a mixture of different carriers such as, e.g., a mixture of hydrophilic and/or hydrophobic carriers.

10

15

In another interesting embodiment, the carrier is a surfactant or a substance having surface-active properties. It is contemplated that such substances are involved in the wetting of e.g. slightly soluble active substance and thus, contributes to improved solubility characteristics of the active substance.

Examples on surfactants are given in the following. In order to be suitable for use as a carrier, the criteria with respect to melting point and/or viscosity discussed herein must be fulfilled. However, the list below encompasses surfactants in general, because surfactants may also be added to the carrier composition in the form of pharmaceutically acceptable excipients.

In a process according to the invention, the carrier may be employed as such or in the form of a carrier composition. A carrier composition comprises one or more carriers optionally together with one or more other ingredients. Thus, the carrier composition may comprise a mixture of hydrophilic and/or hydrophobic carriers and/or surfactants. The carrier composition may also comprise one or more therapeutically and/or prophylactically active substances and/or one or more pharmaceutically acceptable excipients.

20

35

Suitable excipients for use in a carrier composition (and – as discussed above – for use as carriers it selves) are surfactants such as, e.g., hydrophobic and/or hydrophilic surfactants as those disclosed in WO 00/50007 in the name of Lipocine, Inc. Examples on suitable surfactants are

- polyethoxylated fatty acids such as, e.g. fatty acid mono- or diesters of polyethylene glycol or mixtures thereof such as, e.g. mono or diesters of polyethylene glycol with lauric acid, oleic acid, stearic acid, myristic acid, ricinoleic acid, and the polyethylene glycol may be selected from PEG 4, PEG 5, PEG 6, PEG 7, PEG 8, PEG 9, PEG 10, PEG 12, PEG 15, PEG 20, PEG 25, PEG 30, PEG 32, PEG 40, PEG 45, PEG 50, PEG 55, PEG 100, PEG 200, PEG 400, PEG 600, PEG 800, PEG 1000, PEG 2000, PEG 3000, PEG 3000, PEG 4000, PEG 5000, PEG 6000, PEG 7000, PEG 8000, PEG 9000, PEG 1000, PEG 1000, PEG 1000, PEG 1000, PEG 35,000,
 - ii) polyethylene glycol glycerol fatty acid esters, i.e. esters like the abovementioned but in the form of glyceryl esters of the individual fatty acids;

35

- glycerol, propylene glycol, ethylene glycol, PEG or sorbitol esters with e.g. vegetable oils like e.g. hydrogenated castor oil, almond oil, palm kernel oil, castor oil, apricot kernel oil, olive oil, peanut oil, hydrogenated palm kernel oil and the like,
- 5 iv) polyglycerized fatty acids like e.g. polyglycerol stearate, polyglycerol oleate, polyglycerol ricinoleate, polyglycerol linoleate,
 - v) propylene glycol fatty acid esters such as, e.g. propylene glycol monolaurate, propylene glycol ricinoleate and the like,
 - vi) mono- and diglycerides like e.g. glyceryl monooleate, glyceryl dioleae, glyceryl mono- and/or dioleate, glyceryl caprylate, glyceryl caprate etc.;
 - vii) sterol and sterol derivatives;
 - viii) polyethylene glycol sorbitan fatty acid esters (PEG-sorbitan fatty acid esters) such as esters of PEG with the various molecular weights indicated above, and the various Tween ® series;
- 15 ix) polyethylene glycol alkyl ethers such as, e.g. PEG oleyl ether and PEG lauryl ether;
 - x) sugar esters like e.g. sucrose monopalmitate and sucrose monolaurate;
 - xi) polyethylene glycol alkyl phenols like e.g. the Triton® X or N series;
- polyoxyethylene-polyoxypropylene block copolymers such as, e.g., the
 Pluronic® series, the Synperonic® series, Emkalyx®, Lutrol®, Supronic® etc.
 The generic term for these polymers is "poloxamers" and relevant examples in the present context are Poloxamer 105, 108, 122, 123, 124, 181, 182, 183, 184, 185, 188, 212, 215, 217, 231, 234, 235, 237, 238, 282, 284, 288, 331, 333, 334, 335, 338, 401, 402, 403 and 407;
- 25 xiii) sorbitan fatty acid esters like the Span® series or Ariacel® series such as, e.g. sorbinan monolaurate, sorbitan monopalmitate, sorbitan monooleate, sorbitan monostearate etc.;
 - xiv) lower alcohol fatty acid esters like e.g. oleate, isopropyl myristate, isopropyl palmitate etc.;
- 30 xv) ionic surfactants including cationic, anionic and zwitterionic surfactants such as, e.g. fatty acid salts, bile salts, phospholipids, phosphoric acid esters, carboxylates, sulfates and sulfonates etc.
 - When a surfactant or a mixture of surfactants is present in a carrier composition the concentration of the surfactant(s) is normally in a range of from about 0,1 –75% w/w

such as, e.g., from about 0.1 to about 20% w/w, from about 0.1 to about 15% w/w, from about 0.5 to about 10% w/w, or alternatively, when applicable as a carrier or a part of the carrier composition from about 20 to about 75% w/w such as, e.g. from about 25 to about 70% w/w, from about 30 to about 60% w/w.

5

10

15

30

35

Other suitable excipients in a carrier composition may be solvents or semi-solid excipients like, e.g. propylene glycol, polyglycolised glycerides including Gelucire 44/14, complex fatty materials of plant origin including theobroma oil, carnauba wax, vegetable oils like e.g. almond oil, coconut oil, corn oil, cottonseed oil, sesame oil, soya oil, olive oil, castor oil, palm kernels oil, peanut oil, rape oil, grape seed oil etc., hydrogenated vegetable oils such as, e.g. hydrogenated peanut oil, hydrogenated palm kernels oil, hydrogenated cottonseed oil, hydrogenated soya oil, hydrogenated castor oil, hydrogenated coconut oil; natural fatty materials of animal origin including beeswax, lanolin, fatty alcohols including cetyl, stearyl, lauric, myristic, palmitic, stearic fatty alcohols; esters including glycerol stearate, glycol stearate, ethyl oleate, isopropyl myristate; liquid interesterified semi-synthetic glycerides including Miglycol 810/812; amide or fatty acid alcolamides including stearamide ethanol, diethanolamide of fatty coconut acids etc.

Other additives in the carrier composition may be antioxidants like e.g. ascorbic acid, ascorbyl palmitate, butylated hydroxyanisole, butylated hydroxytoluene, hypophosphorous acid, monothioglycerol, potassium metabisulfite, propyl gallate, sodium formaldehylde sulfoxylate, sodium metabisulfite, sodium thiosulfate, sulfur dioxide, tocopherol, tocopherol acetate, tocopherol hemisuccinate, TPGS or other tocopherol derivatives, etc. The carrier composition may also contain e.g. stabilising agents. The concentration of an antioxidant and/or a stabilizing agent in the carrier composition is normally from about 0.1 % w/w to about 5% w/w.

In those cases where a carrier composition is employed, the requirements with respect to the melting point mentioned above normally also apply to the carrier composition, especially in those cases where a minor amount of water is included in the carrier composition. However, when the carrier composition is heated the carrier composition may be in the form of two or more phases (e.g. two distinct liquid phase, or a liquid phase comprising e.g. an active substance dispersed therein). In such cases, the melting point is not a true melting point but merely a heating point where

the carrier composition becomes in a liquid form, which is suitable for use in a spraying device. Often such a heating point will for practical purposes correspond to the melting point of the carrier itself.

The total concentration of carrier(s) in the carrier composition is normally in a range of from about 5 to about 100% w/w such as, e.g., from about 10 to about 99.5% w/w, from about 15 to about 99% w/w, from about 15 to about 98% w/w, from about 15 to about 97% w/w, from about 20 to about 95% w/w such as at least about 25% w/w, at least about 30% w/w, at least about 35% w/w, at least about 40% w/w, at least about 45% w/w, at least about 55% w/w, at least about 60% w/w, at least about 65% w/w, at least about 70% w/w, at least about 75% w/w, at least about 80% w/w, at least about 85% w/w, at least about 90% w/w, at least about 95% w/w or at least about 98% w/w.

As explained above, in a process according to the invention the carrier or the carrier composition is brought on liquid form by heating the carrier and/or the carrier composition to a temperature, which causes the carrier and/or the carrier composition to melt, and the carrier in liquid form (i.e. as a solution or a dispersion) is sprayed on the second composition.

20

25

30

35

As mentioned above, the carrier or the carrier composition in melted or liquidized form is sprayed on a second composition. Thus, the carrier or the carrier composition should have a suitable viscosity. If the viscosity is too high, the carrier or carrier composition will be too "thick" and will have a tendency of adhering to the nozzle, which may result in that the delivery through the nozzle is stopped. For the present purpose a viscosity of the carrier and/or the carrier composition is suitably if the viscosity (Brookfield DV-III) is at the most about 800 mPas at a temperature of at the most 100 °C such as, e.g., at the most 700, at the most 600, at the most 500 mPas. In those cases where the melting point of the carrier or the carrier composition is more than about 80 °C, the viscosity values mentioned above are at a temperature of about 40 °C above the melting point.

In the particulate material obtained by a process according to the invention, the concentration of the carrier is from about 5 to about 95% w/w such as, e.g. from about 5 to about 90% w/w, from about 5 to about 80% w/w,

10

15

30

35

from about 10 to about 75% w/w, from about 15 to about 75% w/w, from about 20 to abut 75% w/w, from about 25% to about 75% w/w, from about 30% to about 75% w/w. from about 35% to about 75% w/w, from about 25% to about 70% w/w, from about 30% to about 70% w/w, from about 35% to abut 70 % w/w. from about 40% to about 70% w/w, from about 45% to about 65% w/w or from about 45% to about 60% w/w.

In those cases where the second composition comprises a pharmaceutically acceptable excipient that has a relatively high particle density it is preferred that the concentration of the carrier in the particulate material obtained by a process of the invention is from about 5 to about 95% v/v such as, e.g. from about 5 to about 90% v/v, from about 5 to about 85% v/v, from about 5 to about 80% v/v, from about 10 to about 75% v/v from about 15 to about 75% v/v, from about 20 to abut 75% v/v, from about 25% to about 75% v/v, from about 30% to about 75% v/v, from about 35% to about 75% v/v, from about 25% to about 70% v/v, from about 30% to about 70% v/v, from about 35% to about 70% v/v, from about 40% to about 70% v/v, from about 45% to about 65% v/v or from about 45% to about 60% v/v.

In the following is given a calculation example:

20 Recalculation from % w/w to % v/v (of total composition):

Particle density of lactose: 1.56 g/cm³

Particle density of calcium hydrogen phosphate anhydrous: 2.89 g/cm³

Particle density of PEG 6000: 1.17 g/cm³

25 For lactose: w/w ratio of 50% PEG 6000/(lactose + PEG 6000) equals a % v/v of 56% For calcium hydrogen phosphate anhydrous: w/w ratio of 50% PEG 6000/(calcium hydrogen phosphate anhydrous + PEG 6000) equals a % v/v of 71%.

In many cases it is suitable to dissolve or disperse a therapeutically and/or prophylactically active substance in the carrier or in the carrier composition. Suitable therapeutically and/or prophylactically active substances are discussed below.

In a process according to the invention it is not necessary to employ water or an aqueous medium e.g. together with a binder in order to build up agglomerates of a suitable size. The agglomeration suitably takes place under water-free or substantially

water-free conditions. Thus, the process is also very useful when active substances or other ingredients are employed which are susceptible to water (e.g. degradation under aqueous conditions). However, if desired, water or an aqueous medium may of course be incorporated in the carrier composition. Although the carrier composition normally is essentially non-aqueous, water may be present to a certain extent and then the concentration of water in the carrier composition is the most about 20% w/w water such as at the most about 15% w/w, at the most abut 10% w/w, at the most about 5% w/w or at the most about 2.5% w/w.

Therapeutically and/or prophylactically active substances 10

5

15

20

25

30

35

In a preferred embodiment of the invention the particulate material obtained by a process according to the invention comprises a therapeutically and/or prophylactically. active substance. The particulate matter may also or alternatively comprise a cosmetically active substance (i.e. a substance that is employed in cosmetic compositions). In a process according to the invention the active substance may be included in the carrier composition and/or in the second composition.

In the present context a therapeutically and/or prophylactically active substance includes any biologically and/or physiologically active substance that has a function on an animal such as, e.g. a mammal like a human. The term includes drug substances, hormones, genes or gene sequences, antigen-comprising material, proteins, peptides, nutrients like e.g. vitamins, minerals, lipids and carbohydrates and mixtures thereof. Thus, the term includes substances that have utility in the treatment and/or preventing of diseases or disorders affecting animals or humans, or in the regulation of any animal or human physiological condition. The term also includes any biologically active substance which, when administered in an effective amount, has an effect on living cells or organisms.

Many active substances have and it is expected that many of the future drug substances will have undesired properties especially with respect to water solubility and to oral bioavailability. Therefore, a novel technology, which enables especially therapeutically and/or prophylactically active substances to be delivered to the body in a relatively easy manner and at the same time enables the desired therapeutic and/or prophylactic response, is highly needed.

10

15

20

25

30

35

By employment of a process according to the present invention it is contemplated that this object can be achieved for many such substances, especially in view of the promising results the inventors have obtained from a study in Beagle dogs. Accordingly, the present inventors have found very promising results with respect to bioavailability when a process according to the invention is employed for the preparation of particulate material containing an active substance with a very low aqueous solubility. Thus, a process according to the invention is especially suitable for use for the preparation of particulate material comprising an active substance that has an aqueous solubility at 25 °C and pH of 7.4 of at the most about 3 mg/ml such as, e.g., at the most about 2 mg/ml, at the most about 750 μ g/ml, at the most about 500 μ g/ml, at the most about 250 μ g/ml, at the most about 100 μ g/ml, at the most about 10 μ g/ml. In specific embodiments the solubility of the active substance may be much lower such as, e.g., at the most about 1 μ g/ml, at the most about 1 μ g/ml, at the most about 1 μ g/ml, at the most about 100 ng/ml, at the most about 75 ng/ml such as about 50 ng/ml.

As mentioned above, a process according to the invention may advantageously be carried out without employment of water or an aqueous medium. Thus, the process is especially suitable for use for active substances that are degraded, decomposed or otherwise influenced by water.

Examples on active substances suitable for use in a particulate material according to the invention are in principle any active substance such as, e.g. freely water soluble as well as more slightly or insoluble active substances. Thus, examples on active substances suitable for use are e.g. antibacterial substances, antihistamines and decongestants, anti-inflammatory agents, antiparasitics, antivirals, local anesthetics, antifungals, amoebicidals or trichomonocidal agents, analgesics, antianxiety agents, anticlotting agents, antiarthritics, antiasthmatics, antiarthritic, anticoagulants, anticonvulsants, antidepressants, antidiabetics, antiglaucoma agents, antimalarials, antimicrobials, antineoplastics, antiobesity agents, antipsychotics, antihypertensives, antitussives, auto-immune disorder agents, anti-impotence agents, anti-Parkinsonism agents, anti-Alzheimers' agents, antipyretics, anticholinergics, anti-ulcer agents, anorexic, beta-blockers, beta-2 agonists, beta agonists, blood glucose-lowering agents, bronchodilators, agents with effect on the central nervous system,

cardiovascular agents, cognitive enhancers, contraceptives, cholesterol-reducing agents, cytostatics, diuretics, germicidals, H-2 blockers, hormonal agents, hypnotic agents, inotropics, muscle relaxants, muscle contractants, physic energizers, sedatives, sympathomimetics, vasodilators, vasoconstrictors, tranquilizers, electrolyte supplements, vitamins, counterirritants, stimulants, anti-hormones, drug antagonists, lipid-regulating agents, uricosurics, cardiac glycosides, expectorants, purgatives, contrast materials, radiopharmaceuticals, imaging agents, peptides, enzymes, growth factors, etc.

10 Specific examples include e.g.

Anti-inflammatory drugs like e.g. ibuprofen, indometacin, naproxen, nalophine;

Anti-Parkinsonism agents like e.g. bromocriptine, biperidin, benzhexol, benztropine etc.

Antidepressants like e.g. imipramine, nortriptyline, pritiptyline, etc.

Antibiotics like e.g. clindamycin, erythomycin, fusidic acid, gentamicin, mupirocine, amfomycin, neomycin, metronidazol, sulphamethizole, bacitracin, framycetin, polymyxin B, acitromycin etc,

Antifungal agents like e.g. miconazol, ketoconaxole, clotrimazole, amphotericin B, nystatin, mepyramin, econazol, fluconazol, flucytocine, griseofulvin, bifonazole, amorofine, mycostatin, itrconazole, terbenafine, terconazole, tolnaftate etc.

Antimicrobial agents like e.g.metronidazole, tetracyclines, oxytetracylines, penicillins etc.

30 Antiemetics like e.g. metoclopramide, droperidol, haloperidol, promethazine etc.

Antihistamines like e.g. chlorpheniramine, terfenadine, triprolidine etc.

Antimigraine agents like e.g. dihydroergotamine, ergotamine, pizofylline etc.

25

Coronary, cerebral or peripheral vasodilators like e.g. nifedipine, diltiazem etc.

Antianginals such as, e.g., glyceryl nitrate, isosorbide dinitrate, molsidomine, verapamil etc.

5

10

Calcium channel blockers like e.g. verapamil, nifedipine, diltiazem, nicardipine etc.

Hormonal agents like e.g. estradiol, estron, estriol, polyestradiol, polyestriol, dienestrol, diethylstilbestrol, progesterone, dihydroprogesterone, cyprosterone, danazol, testosterone etc.

Contraceptive agents like e.g. ethinyl estradiol, lynestrenol, etynodiol, norethisterone, mestranol, norgestrel, levonorgestrel, desodestrel, medroxyprogesterone etc.

15 Antithrombotic agents like e.g. heparin, warfarin etc.

Diuretics like e.g. hydrochlorothiazide, flunarizine, minoxidil etc.

Antihypertensive agents like e.g. propanolol, metoprolol, clonidine, pindolol etc.

20

Corticosteroids like e.g. beclomethasone, betamethasone, betamethasone-17-valerate, betamethasone-dipropionate, clobetasol, clobetasol-17-butyrate, clobetasol-propionate, desonide, desoxymethasone, dexamethasone, diflucortolone, flumethasone, flumethasone-pivalte, fluocinolone acetonide, fluocinoide,

25 hydrocortisone, hydrocortisone-17-butyrate,

hydrocortisonebuteprate, methylprednisolone, triamcinolone acetonide, hacinonide, fluprednide acetate, alklometasone-dipropionate, fluocortolone, fluticason-propionte, mometasone-furate, desoxymethasone, diflurason-diacetate, halquinol, cliochinol, chlorchinaldol, fluocinolone-acetonide etc.

30

Dermatological agents like e.g. nitrofurantoin, dithranol, clioquinol, hydroxyquinoline, isotretionin, methoxsalen, methotrexate, tretionin, trioxalen, salicylic acid, penicillamine etc.

Steroids like e.g. estradiol, progesterone, norethindrone, levonorgestrel, ethynodiol, levonorgestrol, norgestimate, gestanin, desogestrel, 3-keton-desogesterel, demegestone, promethoestrol, testosterone, spironolactone and esters thereof etc.

Nitro compounds like e.g. amyl nitrates, nitroglycerine and isosorbide nitrate etc.

Opioids like e.g. morphine, buprenorphine, oxymorphone, hydromorphone, codeine, tramadol etc.

Prostaglandins such as, e.g., a member of the PGA, PGB, PGE or PGF series such as, e.g. minoprostol, dinoproston, carboprost, eneprostil etc.

Peptides like e.g. growth hormone releasing factors, growth factors (e.g. epidermal growth factor (EGF), nerve growth factor (NGF), TGF, PDGF, insulin growth factor (IGF), fibroblast growth factor (aFGF, bFGF etc.), somatostatin, calcitonin, insulin, vasopressin, interferons, IL-2 etc., urokinase, serratiopeptidase, superoxide dismutase, thyrotropin releasing hormone, lutenizing hormone releasing hormone (LH-RH), corticotrophin releasing hormone, growth hormone releasing hormone (GHRH), oxytocin, erythropoietin (EPO), colony stimulating factor (CSF) etc.

20

15

Interesting examples on active substances that are slightly soluble, sparingly soluble or insoluble in water are given in the following tables:

Table 1
Poorly-Soluble Drug
Candidates

Drug Name	Therapeutic Class Solubility In Water			
Alprazolam	CNS	Insoluble		
Amiodarone	Cardiovascular	Very Slightly		
Amlodipine ·	Cardiovascular	Slightly		
Astemizole	Respiratory	Insoluble		
Atenolol	Cardiovascular	Slightly		
Azathioprine	Anticancer	Insoluble		
Azelastine	Respiratory	Insoluble		
Beclomethasone	Respiratory	Insoluble		
Budesonide	Respiratory	Sparingly		
Buprenorphine	CNS	Slightly		
Butalbital	CNS	Insoluble		
Carbamazepine	CNS	Insoluble		
Carbidopa	CNS	Slightly		
Cefotaxime	Anti-infective	Sparingly		
Cephalexin	Anti-infective	Slightly		
Cholestyramine	Cardiovascular	Insoluble		
Ciprofloxacin	Anti-infective	Insoluble		
Cisapride	Gastrointestinal	insoluble		
Cisplatin	Anticancer	Slightly		
Clarithromycin	Anti-infective	insoluble		
Clonazepam	CNS	Slightly		
Clozapine	CNS	Slightly		

(continued)

Drug Name	Therapeutic Class	Solubility in Water	
Cyclosporin	Immunosuppressant	Practically Insoluble	
Diazepam	CNS	Slightly	
Diclofenac sodium	NSAID	Sparingly	
Digoxin	Cardiovascular	Insoluble	
Dipyridamole	Cardiovascular	Slightly	
Divalproex	CNS	Slightly	
Dobutamine	Cardiovascular	Sparingly	
Doxazosin	Cardiovascular	Slightly	
Enalapril	Cardiovascular	Sparingly	
Estradiol	Hormone	Insoluble	
Etodolac	NSAID	Insoluble	
Etoposide	Anticancer	Very Slightly	
Famotidine	Gastrointestinal	Slightly	
Felodipine	Cardiovascular	Insoluble	
Fentanyl citrate	CNS	Sparingly	
Fexofenadine	Respiratory	Slightly	
Finasteride	Genito-urinary	Insoluble	
Fluconazole	Antifungal	Slightly	
Flunosolide	Respiratory	Insoluble	
Flurbiprofen	NSAID	Slightly	
Fluvoxamine	CNS	Sparingly	
Furosemide	Cardiovascular	Insoluble	
Glipizide	Metabolic	Insoluble	
Glyburide	Metabolic	Sparingly	
Ibuprofen	NSAID	Insoluble	
Isosorbide dinitrate	Cardiovascular	Sparingly	
Isotretinoin	Dermatological	Insoluble	
Isradipine	Cardiovascular	Insoluble	
Itraconzole	Antifungal	Insoluble	

(continued)

Drug Name	Therapeutic Class Solubility In Water		
:			
Ketoconazole	Antifungal	Insoluble	
Ketoprofen	NSAID	Slightly	
Lamotrigine	CNS	Slightly	
Lansoprazole	Gastrointestinal	Insoluble	
Loperamide	Gastrointestinal	Slightly	
Loratadine	Respiratory	Insoluble	
Lorazepam	CNS	Insoluble	
Lovastatin	Cardiovascular	Insoluble	
Medroxyprogesterone	Hormone	Insoluble	
Mefenamic acid	Analgesic	Slightly	
Methylprednisolone	Steroid	insoluble	
Midazolam	Anesthesia	insoluble	
Mometasone	Steroid	Insoluble	
Nabumetone	NSAID	insoluble	
Naproxen	NSAID	insoluble	
Nicergoline	CNS	Insoluble	
Nifedipine	Cardiovascular	Practically Insoluble	
Norfloxacin	Anti-infective	Slightly	
Omeprazole	Gastrointestinal	Slightly	
Paditaxel	Anticancer	insoluble	
Phenytoin	CNS	Insoluble	
Piroxicam	NSAID	Sparingly	
Quinapril	Cardiovascular	Insoluble	
Ramipril	Cardiovascular	Insoluble	
Risperidone	CNS	Insoluble	
Saquinavir	Protease inhibitor	Practically insoluble	
Sertraline	CNS	Slightly	
Simvastatin	Cardiovascular	Insoluble	
Terbinafine	Antifungal	Slightly	
Terfenadine	Respiratory	Slightly	
Trlamcinolone	Steroid	Insoluble	
Valproic acid	CNS	Slightly	
Zolpidem	CNS	Sparingly	

Table 2
Poorly-Soluble Drugs with
Low Bioavailability

Drug Name	Indication	Solubility In Water	Bioavailability
Asternizole	Allergic Rhinitis	Insoluble	Low - moderate
Cyclandelate	Peripheral vascular disease	Insoluble	Low
Perphenazine	Psychotic disorder	insoluble	Low
Testosterone	Androgen Replacement Therapy	Insoluble	Low
Famotidine	GERD	Slightly soluble	Low (39-50%)
Budesonide	Allergic Rhinitis	Sparingly soluble	Low (~15%)
Mesalamine	Irritable Bowel Syndrome	Slightly soluble	Low (~20%)
Clemastine furnarate	Allergic Rhinitis	Slightly soluble	Low (~39%)
Buprenorphine	Pain	Slightly soluble	Low (<30%)
Sertraline	Anxiety	Slightly soluble	Low (<44%)
Auranofin	Arthritis	Slightly soluble	Low (15-25%)
Felodipine	Hypertension	Insoluble	Low (15%)
Isradipine	Hypertension	Insoluble	Low (15-24%)
Danazol	Endometriosis	Insoluble	Low
Loratadine	Allergic Rhinitis	Insoluble	Low
Isosorbide dinitrate	Angina	Sparingly soluble	Low (20-35%)
Fluphenazine	Psychotic disorder	Insoluble	Low (2-3%)
Spironolactone	Hypertension, Edema	insoluble	Low (25%)
Biperiden	Parkinson's disease	Sparingly soluble	Low (29-33%)
Cyclosporin	Transplantation	Slightly soluble	Low (30%)
Norfloxacin	Bacterial Infection	Slightly soluble	Low (30-40%)
Cisapride	GERD	Insoluble	Low (35-40%)
Nabumetone	Arthritis	Insoluble	Low (35%)
Dronabinoi	ANTIEMETIC	Insoluble	Low 10-20%)
Lovastatin	Hyperlipidemia	Insoluble	Low (~5%)
Simvastatin	Hyperlipldemia	Insoluble	Low (<5%)

The amount of active substance incorporated in a particulate material (and/or in a pharmaceutical, cosmetic or food composition) may be selected according to known principles of pharmaceutical formulation. In general, the dosage of the active substance present in a particulate material according to the invention depends *inter alia* on the specific drug substance, the age and condition of the patient and of the disease to be treated.

A particulate material according to the invention may comprise a cosmetically active ingredient and/or a food ingredient. Specific examples include vitamins, minerals, vegetable oils, hydrogenated vegetable oils, etc.

5 Second composition

As mentioned above the carrier or carrier composition is sprayed on a second composition. In order to be able to achieve a high amount of carrier in the final particulate material and in order to enable a controlled agglomeration of the particles comprised in the second composition, the present inventors have surprisingly found that in specific embodiments, the second composition should initially have a temperature which is at least about 10 °C such as, e.g., at least about 15 °C, at least about 20 °C, at least about 25 °C, or at least about 30 °C below the melting point of the carrier or carrier composition (or, as discussed above, the heating point of the carrier composition). However, as mentioned above, a temperature difference of at least about 10 °C it is not always necessary. Thus, the second composition may have a temperature of at the most a temperature corresponding to the melting point of the carrier and/or of the carrier composition such as, e.g., a temperature of at least about 2 °C, at least about 5 °C. No external heating of the second composition is normally employed during the process of the invention, but in some cases it may be advantageous to employ a cooling via the inlet air. However, the temperature of the second composition may increase to a minor extent due to the working of the composition. However, the temperature must (or will) not be higher than at the most the melting point of the carrier or carrier composition such as, e.g. at the most about 5 °C such as at the most about 10 °C, at the most about 15 °C or at the most about 20 °C below the melting point of the carrier or the carrier composition. Accordingly, a process of the invention can be carried out without any heating of the second composition, i.e. it can be carried out at ambient or room temperature (i.e. normally in a range of from about 20 °C to about 25 °C).

30

10

15

20

25

In contrast thereto, known melt granulation methods involve external heating of the material that is to be granulated (or agglomerated) together with a melt binder.

20

25

30

35

The second composition comprises pharmaceutically and/or cosmetically acceptable excipients and, furthermore, a therapeutically and/or prophylactically active substance may be present in the second composition.

In the present context the terms "pharmaceutically acceptable excipient" and
"cosmetically acceptable excipient" are intended to denote any material, which is inert
in the sense that it substantially does not have any therapeutic and/or prophylactic
effect per se. Such an excipient may be added with the purpose of making it possible
to obtain a pharmaceutical and/or cosmetic composition, which has acceptable
technical properties.

Examples on suitable excipients for use in a second composition include fillers, diluents, disintegrants, binders, lubricants etc. or mixture thereof. As the particulate material obtained by a process according to the invention may be used for different purposes, the choice of excipients is normally made taken such different uses into considerations. Other pharmaceutically acceptable excipients for use in a second composition (and/or in the carrier composition) are e.g. acidifying agents, alkalizing agents, preservatives, antioxidants, buffering agents, chelating agents, coloring agents, complexing agents, emulsifying and/or solubilizing agents, flavors and perfumes, humectants, sweetening agents, wetting agents etc.

Examples on suitable fillers, diluents and/or binders include lactose (e.g. spray-dried lactose, *α*-lactose, *β*-lactose, Tabletose®, various grades of Pharmatose®, Microtose® or Fast-Floc®), microcrystalline cellulose (various grades of Avicel®, Elcema®, Vivacel®, Ming Tai® or Solka-Floc®), hydroxypropylcellulose, L-hydroxypropylcellulose (low substituted), hydroxypropyl methylcellulose (HPMC) (e.g. Methocel E, F and K, Metolose SH of Shin-Etsu, Ltd, such as, e.g. the 4,000 cps grades of Methocel E and Metolose 60 SH, the 4,000 cps grades of Methocel F and Metolose 65 SH, the 4,000, 15,000 and 100,000 cps grades of Methocel K; and the 4,000, 15,000, 39,000 and 100,000 grades of Metolose 90 SH), methylcellulose polymers (such as, e.g., Methocel A, Methocel A4C, Methocel A15C, Methocel A4M), hydroxyethylcellulose, sodium carboxymethylcellulose, carboxymethylene, carboxymethylhydroxyethylcellulose and other cellulose derivatives, sucrose, agarose, sorbitol, mannitol, dextrins, maltodextrins, starches or modified starches (including potato starch, maize starch and rice starch), calcium phosphate (e.g. basic calcium

phosphate, calcium hydrogen phosphate, dicalcium phosphate hydrate), calcium sulfate, calcium carbonate, sodium alginate, collagen etc.

- Specific examples of diluents are e.g. calcium carbonate, dibasic calcium phosphate, tribasic calcium phosphate, calcium sulfate, microcrystalline cellulose, powdered 5 cellulose, dextrans, dextrin, dextrose, fructose, kaolin, lactose, mannitol, sorbitol, starch, pregelatinized starch, sucrose, sugar etc.
- Specific examples of disintegrants are e.g. alginic acid or alginates, microcrystalline cellulose, hydroxypropyl cellulose and other cellulose derivatives, croscarmellose 10 sodium, crospovidone, polacrillin potassium, sodium starch glycolate, starch, pregelatinized starch, carboxymethyl starch (e.g. Primogel® and Explotab®) etc.
- Specific examples of binders are e.g. acacia, alginic acid, agar, calcium carrageenan, sodium carboxymethylcellulose, microcrystalline cellulose, dextrin, ethylcellulose, 15 gelatin, liquid glucose, guar gum, hydroxypropyl methylcellulose, methylcellulose, pectin, PEG, povidone, pregelatinized starch etc.
- Glidants and lubricants may also be included in the second composition. Examples include stearic acid, magnesium stearate, calcium stearate or other metallic stearate, 20 talc, waxes and glycerides, light mineral oil, PEG, glyceryl behenate, colloidal silica, hydrogenated vegetable oils, corn starch, sodium stearyl fumarate, polyethylene glycols, alkyl sulfates, sodium benzoate, sodium acetate etc.
- Other excipients which may be included in the second composition (and/or in the 25 carrier composition) are e.g. colouring agents, taste-masking agents, pH-adjusting agents, solubilizing agents, stabilising agents, wetting agents, surface active agents, antioxidants, agents for modified release etc.
- In certain cases it may be advantageously to incorporate a magnesium 30 aluminometasilicate in the particulate material. It may be a part of the second composition or it may be added subsequently in order to facilitate a further processing of the particulate material (e.g. to prepare solid dosage forms like capsules or tablet). Magnesium aluminometasilicate is sold under the name Neusilin and is obtainable from Fuji Chemical Industries. Neusilin is normally used in order to improve filling 35

10

15

20

25

30

35

capacity and compression property of powders and granules when added. Neusilin is also believed to reduce weight variation and to improve hardness and disintegration of tablets. Finally, Neusilin has an adsorption capability, which makes it suitable for use when processing waxy materials like oil extracts and waxes into pharmaceutical composition. Especially Neusilin UFL2 and US2 are said to be suitable for such a use.

Thus, in one aspect the invention relates to a process, wherein the second composition comprises magnesium aluminosilicate and/or magnesium aluminometasilicate such as, e.g, Neusilin S1, Neusilin FH2, Neusilin US2, Neusilin UFL2 or the like. Other suitable substances are contemplated to be bentonite, kaolin, magnesium trisilicate, montmorillonite and/or saponite. In a still further embodiment, the second composition comprises magnesium aluminosilicate and/or magnesium aluminometasilicate such as, e.g, Neusilin, and the particulate material obtained has an content of carrier of at least about 30% v/v such as, e.g, at least about 40% v/v, at least about 50% v/v, at least about 60% v/v, at least about 70% v/v, at least about 90% v/v.

Besides the known use of Neusilin, the present inventors have found that specific qualities of magnesium aluminometasilicate (Neusilin) have excellent properties as glidants or anti-adhesive most likely due to the porous structure of Neusilin. Thus, Neusilin may advantageously be added in order to reduce any adherence of the particulate material to the manufacturing equipment in particular to the tabletting machine. In the examples herein is given a comparison of the anti-adhesive properties of Neusilin compared with known lubricants and Neusilin seems to be a very promising and novel candidate as a lubricant.

Details on controlled agglomeration

A process according to the invention may be carried out in a high or low shear mixer or in a fluid bed. Important characteristics are that the carrier or the carrier composition is sprayed on the second composition, which is loaded into the mixer or the fluid bed. Normally, the carrier or the carrier composition is heated to a temperature above the melting point of the carrier and/or the carrier composition and the second composition has not been subject to any heating and has normally ambient temperature. The difference in temperature between the carrier and the

second composition makes the carrier solidify rapidly which in turn leads to a controlled growth of the particle size. Thus, the inventors have found that by employing such conditions it is possible to control the agglomeration process so that the growth in particle size is controlled.

5

10

15

20

25

In the present context, the term "controlled agglomeration" is intended to mean that the increase in mean geometric diameter of a material is a linear or approximated linear function of the carrier concentration in the carrier composition (see Fig. 1). Controlled agglomeration is also present if a d_{gw} of < or = 500 μ m is obtained when a carrier composition containing 20% carrier has been added to a second composition.

The possibility of controlling the agglomeration makes it possible to obtain a particulate material that has a very high load of carrier(s) - much higher than described when conventional methods like e.g. melt granulation is employed. As discussed above, a high load of carrier has shown to be of importance especially when particulate material is prepared containing a slightly water-soluble, sparingly water soluble or insoluble active substances. Fig. 2 is a theoretically calculated curve showing the relationship between obtainable dose and drug solubility in a carrier composition at different carrier concentrations in the particulate material assuming a total composition weight of 500 mg. It is seen that the dose can be increased by a factor of about 3.5 by increasing the concentration of carrier from 20% to 70%. By conventional melt granulation, i.e. a process by which heating of a melt binder and excipients is performed, normally a load of at the most about 15% w/w of the melt binder is obtained (calculated on the final composition). Another granulation method, which makes use of the same temperature of the binder and the material to be granulated, is a conventional granulation process, which is performed either by a wet or a dry granulation process.

30

A SEM micrograph in Fig. 3 shows a particulate material prepared by a process according to the present invention. PEG 6000 is used as a carrier and lactose is used as the second composition. The figure shows that the primary particles of lactose are agglomerated by immersion in the droplets of PEG 6000 or by coalescence between larger agglomerates. The agglomerates are partly coated with PEG 6000. The probability of agglomerate growth by coalescence is reduced by rapidly solidifying

PEG due to the product temperature being kept at a minimum of 10 °C below the melting point of PEG.

In contrast thereto, uncontrolled agglomeration is shown in a SEM micrograph in Figure 4. The particulate material is prepared according to Example 2 herein (uncontrolled agglomeration) using PEG 6000 as carrier and lactose as excipients. The figure shows that the particulate material has larger agglomerates with surplus of liquefied PEG at the surface of the agglomerates increasing the probability of agglomerate growth by coalescence at elevated product temperature.

10

15

20

25

35

5

A process according to the invention may be carried out in a fluid bed. In such cases the second composition is normally kept in a fluidized state by incoming air at ambient temperature. The carrier or carrier composition is sprayed on the fluidized second composition and in order to keep the carrier or carrier composition on a liquid form and/or to avoid any clotting of the spraying device, the spraying device is kept at a suitable temperature above the melting point of the carrier or carrier composition. Normally, the spraying is performed through a spraying device equipped with temperature controlling means.

The particulate material obtained by a process of the invention has a geometric weight mean diameter d_{gw} of $\geq 10~\mu m$ such as, e.g., $\geq 20~\mu m$, from about 20 to about 2000, from about 30 to about 2000, from about 50 to about 2000, from about 60 to about 2000, from about 75 to about 2000 such as, e.g. from about 100 to about 1500 μm , from about 100 to about 1000 μm or from about 100 to about 700 μm . In specific embodiments the geometric weight mean diameter d_{gw} is at the most about 400 μm or at the most 300 μm such as, e.g., from about 50 to about 400 μm such as, e.g., from about 50 to about 300 μm , from about 50 to about 50 to about 50 to about 50 to about 250 μm , from about 100 to about 300 μm .

30 Particulate material – characteristics

Many characteristics of the particulate material obtained by a process according to the invention have already been discussed. In summary, a particulate material has good tabletting properties including good flowability and compactability. It has no or minimal adherence to the tabletting equipment either in itself or after addition of the normal

amount of lubricants. It is an excellent alternative for incorporation of active substances with very low water solubility and/or with a very low bioavailability, or active substances, which are subject to degradation in the presence of water (the process may be carried out without any water).

5

10

Thus, a particulate material of the invention is excellent for a further processing into e.g. tablets. In contrast to capsules, tablets are normally easier and cheaper to produce and tablets are often preferred by the patient. Furthermore, a tablet formulation is relatively easy to adjust to specific requirements, e.g. with respect to release of the active substance, size etc.

The particulate material may also be coated (see Examples) with a film coating, an enteric coating, a modified release coating, a protective coating, an anti-adhesive coating etc.

15

20

Suitable coating materials are e.g. methylcellulose, hydroxypropylmethylcellulose, hydroxypropylcellulose, acrylic polymers, ethylcellulose, cellulose acetate phthalate, polyvinyl acetate phthalate, hydroxypropyl methylcellulose phthalate, polyvinylalcohol, sodium carboxymethylcellulose, cellulose acetate, cellulose acetate phthalate, gelatin, methacrylic acid copolymer, polyethylene glycol, shellac, sucrose, titanium dioxide, carnauba wax, microcrystalline wax, zein.

Plasticizers and other ingredients may be added in the coating material. The same or different active substance may also be added in the coating material.

25

30

35

Pharmaceutical compositions

The particulate material obtained by a process according to the invention may be used as such or it may be further processed to the manufacture of a pharmaceutical and/or a cosmetic composition by addition of one or more suitable pharmaceutically and/or cosmetically acceptable excipients. Furthermore, the particulate material obtained may be provided with a coating to obtain coated particles, granules or pellets. Suitable coatings may be employed in order to obtain composition for immediate or modified release of the active substance and the coating employed is normally selected from the group consisting of film-coatings (for immediate or modified release) and enteric

10

coatings or other kinds of modified release coatings, protective coatings or antiadhesive coatings

The particulate material obtained by a process of the invention is especially suitable for further processing into tablets. The material possesses suitable properties for tabletting purposes, cf. below, but in some cases it may be suitable to add further therapeutically and/or prophylactically active substances and/or excipients to the particulate material before the manufacture of tablets. For examples, by using a mixture of i) an active substance contained in modified release coated granules or granules in the form of modified release matrices and ii) an active substance in freely accessible form, a suitable release pattern can be designed in order to obtain a relatively fast release of an active substance followed by a modified (i.e. often prolonged) release of the same or a different active substance.

As appears from the above, a particulate material obtained by a process of the invention is suitable for use in the manufacture of tablets obtained by direct compression. Furthermore, the particulate material may in itself be employed as a binding agent for use in dry granulation processes.

A particulate material obtained by a process according to the invention may be employed in any kind of pharmaceutical compositions in which the use of a solid particulate material is applicable. Thus, relevant pharmaceutical compositions are e.g. solid, semi-solid, fluid or liquid composition or compositions in the form of a spray. The particulate material may also be incorporated in a suitable drug delivery device such as, e.g. a transdermal plaster, a device for vaginal use or an implant.

Solid compositions include powders, and compositions in dosage unit form such as, e.g. tablets, capsules, sachets, plasters, powders for injection etc.

Semi-solid compositions include compositions like ointments, creams, lotions, suppositories, vagitories, gels, hydrogels, soaps, etc.

Fluid or liquid compositions include solutions, dispersions such as, e.g., emulsions, suspension, mixtures, syrups, etc.

30

Accordingly, the invention also relates to any pharmaceutical composition comprising a particulate material obtainable by a process of the invention.

Other aspects of the invention

5

10

15

20

25

The invention also relates to a pharmaceutical particulate material obtained by mixing a first and a second composition as defined herein and heating to a temperature that is below the melting point of a carrier contained in the first composition. The heating may be applied while mixing or in a separate step. The particulate material generally has a geometric weight mean diameter d_{gw} of $\geq 10~\mu m$ such as, e.g. $\geq 20~\mu m$, from about 20 to about 2000, from about 30 to about 2000, from about 50 to about 2000, from about 60 to about 2000, from about 75 to about 2000 such as, e.g. from about 100 to about 1500 μm , from about 100 to about 1000 μm or from about 100 to about 100 to about 50 to about 300 μm , from about 50 to about 300 μm , from about 50 to about 300 μm , from about 50 to about 300 μm , from about 50 to about 300 μm . In such a material the concentration of the carrier typically is at least about 40% v/v.

Such a particulate material is especially suitable for use in the preparation of solid dosage form such as tablets, capsules, sachets and the like. It may have sufficient properties with respect to flowability and/or anti-adhesion so that addition of e.g. a lubricant can be omitted when preparing a solid dosage form, especially if it comprises magnesium aluminosilicate and/or magnesium aluminometasilicate.

In a further aspect, the invention relates to the use of magnesium aluminosilicate and/or magnesium aluminometasilicate as a lubricant.

All details described herein for the main aspect of the invention apply *mutatis mutandi* to any other aspect of the invention.

30

35

Legends to figures

Fig. 1 shows the correlation between amount of PEG 6000 sprayed onto lactose 125 mesh and mean granule size (geometric weight mean diameter) for a product temperature of 40-45 °C and 50-60 °C, respectively. The dashed line indicates

WO 03/004001 PCT/DK02/00472

29

uncontrolled agglomeration at a PEG concentration of approx. 25% at a product temperature of 50-60 °C. The products are unscreened.

- Fig. 2 shows the relationship between obtainable dose and drug solubility in a carrier at different concentrations of carrier assuming a formulation unit weight of 500 mg.
 - Fig. 3 is a SEM micrograph of PEG sprayed onto lactose 125 mesh; the PEG concentration is 48% w/w. Magnification x 45.
- 10 Fig. 4 is a SEM micrograph of PEG sprayed onto lactose 125 mesh; the PEG concentration is 25% w/w. Magnification x 45.
 - Fig. 5 shows results from Example 4.
- Fig. 6 shows mean serum concentrations vs. time profiles after p.o. administration of the model drug substance from Example 5 (30 mg) in six different formulations to Beagle dogs. Treatment A: 0.5% HPC (aq.), Treatment B: 5% Captisol® (aq.), Treatment C: Model drug substance from Example 5/SLS (2:1), Treatment D: Model drug substance from Example 5/SLS (1:1), Treatment E: Tween 80, Kollidon VA64, corn starch and lactose, Treatment F: Akosoft® 3103.
 - Fig. 8 illustrates determination of a melting point by a DSC curve.

The invention is further illustrated in the following examples.

25

METHODS

Determination of weight variation

The tablets prepared in the Examples herein were subject to a test for weight variation performed in accordance with Ph. Eur.

PCT/DK02/00472

30

Determination of average tablet hardness

WO 03/004001

5

The tablets prepared in the Examples herein were subject to at test for tablet hardness employing Schleuniger Model 6D apparatus and performed in accordance with the general instructions for the apparatus.

Determination of disintegration time

The time for a tablet to disintegrate, i.e. to decompose into particles or agglomerates,

was determined in accordance with Ph. Eur.

Determination of geometric weight mean diameter dgw

The geometric weight mean diameter was determined by employment of a method of laser diffraction dispersing the particulate material obtained (or the starting material) in air. The measurements were performed at 1 bar dispersive pressure in Sympatec Helos equipment, which records the distribution of the equivalent spherical diameter. This distribution is fitted to a log normal volume-size distribution.

When used herein, "geometric weight mean diameter" means the mean diameter of the log normal volume-size distribution.

Determination of aqueous solubility

The aqueous solubility at 25 °C in distilled or purified water was determined by suspending a well -defined and excessive amount of the substance under investigation in a well-defined amount of distilled or purified water. The dispersion is stirred and samples are withdrawn after suitable time periods. The samples are filtered and the filtrate analysed to obtain the concentration of the substance in the sample. The concentration of the substance in the sample is then calculated according to methods well known for a person skilled in the art. The solubility is reached when the concentrations of the substance in two consecutive samples are considered identical.

Determination of dissolution rate

The dissolution rate was determined by employment of USP paddle dissolution method at 37 °C.

5

Materials

All materials employed were of pharmaceutical grade.

10 Calcium hydrogen phosphate (Di-cafos A): Budenheim

Croscarmellose Sodium Ac-Di-Sol: FMC

Magnesium stearate: Magnesia GmbH

Polyethylene glycol: Hoechst

Lactose: DMV

15 Other materials employed appear from the following examples.

Examples

Example 1

20

Preparation of tablets containing a particulate material according to the invention

The example illustrates the preparation of a particulate material comprising a relatively large amount of a carrier. The particulate material obtained exhibits good flowability, good compactability and possesses excellent tabletting properties. Thus, the particulate material allow the preparation of e.g. tablets and in spite of the relatively large load of carrier the tablets display minimal, if any, adherence (sticking) to tablet punches and/or dies during compression. Furthermore, the tablets obtained have acceptable properties with respect to disintegration, weight variation and hardness.

Starting materials

Lactose monohydrate (DMV) 125 mesh

Calcium hydrogen phosphate anhydrous (Di-Ca-Fos P)

Polyethylene glycol 6000 (PEG 6000) having a melting point of about 60 °C

Equipment

Fluid bed Strea-1 (from Aeromatic-Fielder) mounted with a special developed topspray binary nozzle having an opening of 0.8 mm.

5

Granular compositions

Composition 1.1

Lactose

500 g

PEG 6000

420 g (sprayed on lactose)

10

The composition has a carrier concentration of 45.6% w/w.

Composition 1.2

Calcium hydrogen phosphate anhydrous

500 g

15 PEG 6000

210 g (sprayed on calcium hydrogen

phosphate)

The composition has a carrier concentration of 29.6% w/w.

20 Process conditions – description

Lactose (or for composition 1.2 calcium hydrogen phosphate anhydrous) was fluidised at appropriate inlet airflow. The inlet air was not heated. PEG 6000 was melted using an electrically heated pressure tank. The temperature was kept at a temperature at about 85 °C, i.e. above the melting point of PEG 6000. The melt was pumped from the tank to the nozzle through a heated tube. In the tube, the temperature was kept at 80 °C. The pressure in the tank determined the flow rate of the melt. The nozzle was heated to keep the droplets in a liquefied stage by means of heating the atomizer air delivered through the top-spray nozzle.

30 Settings

25

Inlet airflow: 30-50 m³ per hour

Inlet air temperature: Ambient temperature (20-25 °C)

Tank temperature: 85 °C

Tank pressure: 1.5 Bar corresponding to a flow rate of 14-15 g/min

35 Tube temperature: 80 °C

PCT/DK02/00472 WO 03/004001

33

Atomising air temperature: 100 °C

Process time: 28 min

Product temperature at equilibrium: 40 °C (after 15 minutes)

5 Product characteristics

The products (composition 1.1 and 1.2) appear as free flowing granular products with a mean granule size of approx. 300-500 μ m.

Tabletting

10 Compositions

Tablet formulation I (without disintegrant)

Granular product

99% w/w

Magnesium stearate

1% w/w

15

The tablet formulation has a carrier concentration of 45.2% w/w.

Tablet formulation II (with disintegrant)

Granular product

95% w/w

20 Ac-Di-Sol (croscarmelose sodium) 4% w/w (disintegrant)

Magnesium stearate

1% w/w

The tablet formulation has a carrier concentration of 28% w/w.

25 Tablet properties

Tablet formulation I based on composition 1.1, i.e. with lactose

Tablet punch: Compound cup, 10 mm in diameter Tablet machine: Single punch machine Korsch EK0

Tablet weight: 250 mg

30 Weight variation, RSD < 1%

Average tablet hardness: 96 N

Average disintegration time: 10 min

Tablet appearance: White glossy tablets

Tablet formulation I based on composition 1.2, i.e. with dicalcium phosphate 35

Tablet punch: Compound cup, 10 mm in diameter

Tablet machine: Single punch machine Korsch EK0

Tablet weight: 450 mg

Weight variation, RSD < 1%

5 Average tablet hardness: 121 N

Average disintegration time: 17 min

Tablet appearance: White glossy tablets

Tablet formulation II based on composition 1.1, i.e. with lactose

10 Tablet punch: Compound cup, 10 mm in diameter

Tablet machine: Single punch machine Korsch EK0

Tablet weight: 250 mg

Weight variation, RSD < 1%

Average tablet hardness: 112 N

15 Average disintegration time: 8 min

Tablet appearance: White glossy tablets

Thus, addition of a disintegrant results in a decrease in the average disintegration time without any other changes of importance.

20

Tablet formulation II based on composition 1.2, i.e. with calcium hydrogen phosphate

Tablet punch: Compound cup, 10 mm in diameter
Tablet machine: Single punch machine Korsch EK0

Tablet weight: 450 mg

25 Weight variation, RSD < 1%

Average tablet hardness: 118 N
Average disintegration time: 9 min

Tablet appearance: White glossy tablets

When calcium dihydrogen phosphate anhydrous is employed a more pronounced decrease in disintegration time is observed compared with that of lactose. The average tablet hardness is maintained at an excellent level.

Example 2

Controlled agglomeration - proof of concept

5 Method

10

Controlled agglomeration is obtained by keeping the product temperature at minimum10 °C below melting point of the carrier reducing the probability of agglomeration due to coalescence. Controlled agglomeration is characterised by gradual increase in mean granule size (geometric weight mean diameter d_{gw}) as function of applied amount of carrier. In contrast, uncontrolled agglomeration shows rapidly increasing granule size. As a proof of concept the granule growth pattern are compared corresponding to the following conditions:

- Inlet fluidising air temperature of ambient temperature: 20-25 °C
- Inlet fluidising air temperature of 85 °C leading to a temperature of the product of about 50-60 °C,

Starting materials

Lactose monohydrate 125 mesh

20 Polyethylene glycol 6000

Equipment

Fluid bed Strea-1 mounted with a top-spray binary nozzle.

25 Granular compositions

Lactose 400 g

PEG 6000 Increased stepwise in separate experiments (from 0% to about 60% w/w in the final composition)

30 Process conditions

The conditions were the same as described in Example 1.

Settings (controlled agglomeration)

Inlet airflow: 30-50 m³ per hour

35 Inlet air temperature: Ambient temperature (20-25 °C)

Tank temperature: 90 °C

Tank pressure: 1.5 Bar corresponding to a flow rate of 14-15 g/min

Tube temperature: 85 °C

Atomizer air temperature: 100 °C

5 Product temperature at equilibrium: 40 °C

Settings (uncontrolled agglomeration)

Inlet airflow: 30-50 m³ per hour Inlet air temperature: 85 °C

10 Tank temperature: 90 °C

Tank pressure: 1.5 Bar corresponding to a flow rate of 14-15 g/min

Tube temperature: 85 °C

Atomizer air temperature: 100 °C

Product temperature at equilibrium: 55-65 °C

15

20

Product characteristics

Increasing amounts of PEG were sprayed onto the fluidised lactose particles and the particle size distribution of the products was analysed by method of laser diffraction, dispersing the agglomerates in air. The correlation between mean granule size (geometric weight mean diameter d_{gw}) and applied amount of carrier demonstrates the difference between controlled and uncontrolled agglomeration as shown in Figure 1 and Table 1 includes the geometric standard deviation s_g related to the wideness of the size distribution.

	mperature 40-4 mperature: Aml	1	Product temperature 50-60 °C Inlet air temperature: 85 °C		
PEG, w/w%	D _{gw} , μm	Sg	PEG w/w %	D _{gw} , μm	S _g
0	55	2.37	0	55	2.37
17	151	2.09	13	343	1.98
26	261	2.09	15	513	1.48
38	328	2.06	25	980	1.43
48	332	1.95			
60	450	1.8			

WO 03/004001 PCT/DK02/00472

37

Table 1. Particle size characteristics of granulate products produced by agglomeration by melt spraying in fluid bed at heated and unheated inlet air conditions at different applied amount of PEG 6000 concentrations. D_{gw} : Geometric weight mean diameter. S_{g} : Geometric standard deviation.

5

Example 3

Improving tabletting characteristics of paracetamol applying the controlled agglomeration technique

10

Parcetamol has been chosen as model substance representing a substance with poor compression characteristics. By incorporation of PEG 6000 by melt spraying, i.e. spraying melted PEG 6000 on paracetamol, a granular product of paracetamol is obtained with excellent flowability and tablet compression characteristics.

In order to obtain tablets with satisfactory disintegration time Avicel PH 200 and Kollidon CL (super-disintegrant) has been added to the product

Starting materials

Polyethyleneglycol 6000 (Hoechst)

20 Paracetamol (Unikem)

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

25 Process conditions

300 g PEG 6000 was melted by heating to 90 °C in a pressure tank. The melted carrier was pumped through a heated tube (85 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.5 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 25 °C

30

241 g of PEG was sprayed on 250 fluidized paracetamol at a flow rate of 17 g/min. The total yield was 491 g granulate with a composition corresponding to 49,1% w/w PEG 6000 and 50.9% w/w paracetamol. The maximum product temperature was 36 °C at the end of the process.

PCT/DK02/00472 WO 03/004001

38

Product characteristics

The median particle size on volume basis is 85 µm for paracetamol was increased to 295 μm during the controlled agglomeration process. The median particle size was determined by laser diffraction (Helos) dispersing the particles in air.

5

Tablet composition

Paracetamol	44%
PEG 6000	41 %
Avicel PH200	10 %
Kollidon CL	4%
Magnesium stearate	1%

Paracetamol and PEG 6000 are employed in the form of the granular product obtained as described above.

15

10

Avicel PH is blended with the granular product for 2 minutes in Turbula mixer and after adding magnesium stearate for further 0.5 minutes. Avicel PH200 (microcrystalline cellulose) is supplied by FMC, Kollidon CL by BASF and magnesium stearate by Magnesia GmbH.

20

35

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EKO Tablet shape 8 mm doomed shape

Weight: 200 mg

25 Strength 87 mg

> Mean tablet hardness (n =10) determined on a Schleuninger Model 6D apparatus was 77 N

Friability was 0.2% determined at a Roche friabililator

30 Mean disintegration time was 11 minutes (Ph.Eur)

Weight variation (n =20) corresponded to RSD of 0.6%

In conclusion, the tablets obtained from the granulate prepared by the controlled agglomeration method of the invention were very satisfactory and only a relatively small concentration of tabletting excipients was needed in order to ensure a suitable tabletting process. Furthermore, the example demonstrates that it is possible to obtain a granulate that has a relatively high concentration of carrier (about 50% w/w) and at the same time has a suitable particle size for further processing.

5 Example 4

In vivo bioavailability in dogs after administration of tablets containing a particulate material obtained by the controlled agglomeration method of the present invention - proof of concept

10

15

20

25

30

The present example illustrates that a composition containing a particulate material obtained according to the present invention leads to improved bioavailability after oral administration to dogs compared with compositions made by techniques that are generally accepted as useful when an increase in bioavailability is desired. In the present example compositions in the form of a nanosuspension and a microemulsion are used for comparison.

The model drug substance employed illustrates a drug substance that has a very low aqueous solubility of less than 50 ng/ml independent on pH. The molecular weight of the model drug substance is about 600 and it has a lipophilicity i.e. a log P (octanol/water) of 5.0.

Proof of concept is based on a comparison of bioavailability of different oral formulations and an I.V. injection of the drug substance in dogs (n = 4). Data on the I.V. is not included in this example.

Treatment compositions and treatment schedule

Treatment A (comparison treatment): nanosuspension containing 2% w/w of the model drug substance. NanoCrystal™ colloidal suspension of the model drug substance stabilised with hydroxy propyl cellulose (HPC-SL). Supplier: Élan pharmaceutical technologies, USA. EPT Ref. NB: GOT-5747-170. The nanosuspension contains 2% of the model drug substance and 1% HPC-SL (w/w). A treatment consisted in oral administration of 36.3 mg as a sigle dose (approximately 1.8 ml).

Treatment B (according to the invention): tablets containing a particulate material obtained according to the method of the present invention. The tablets contain about 1% w/w of the model drug substance. The preparation of the composition used in Treatment B is described below. A treatment consisted in oral administration of 6 tablets as a single dose corresponding to approx. 37.5 mg.

Treatment C (according to the invention): tablets containing a particulate material obtained according to the method of the present invention. The tablets contain about 5% w/w of the model drug substance. The preparation of the composition used in Treatment C is described below. A treatment consisted in oral administration of 2 tablets as a single dose corresponding to approx. 42.4 mg.

Treatment D (comparison treatment): capsules containing a microemulsion of the model drug substance. Soft gelatine capsules containing 7.3 mg of the model drug substance in a vehicle consisting of 40% w/w Softigen 767, 15% w/w trietylcitrate and 45% w/w polysorbate 80 (0.05% BHA was added by weight as antioxidant). A treatment consisted of a single dose of 5 capsules, equivalent to 36.5 mg of the model drug substance.

20 Treatment E (comparison treatment): capsules containing a microemulsion of the model drug substance. Soft gelatine capsules containing 12.43 mg of the model drug substance in a vehicle consisting of 40% w/w Softigen 767, 15% w/w trietylcitrate and 45% w/w polysorbate 80 (0.05% BHA was added by weight as antioxidant). A treatment consisted of a single dose of 3 capsules, equivalent to 37.2 mg of the model 25 drug substance.

Preparation of a pharmaceutical composition according to the invention used in Treatment B (5 mg model drug substance)

30 Preparation of a particulate material - Melt-spraying process

> Starting materials Polyethyleneglycol 6000 (Hoechst) Poloxamer 188 (BASF) Model drug substance

5

10

15

Avicel PH 101 (FMC)

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

5

10

15

Process conditions

198.0 g PEG 6000 and 85.0 g Poloxamer 188 (70:30 w/w) were melted by heating to 75 °C in a pressure tank. 6.21 g model drug substance was dissolved in the melted carriers. The melt was pumped through a heated tube (80 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.8 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

289 g of melt was sprayed on 300 g fluidized Avicel PH 101 at a flow rate of 10 g/min. The total yield was 589 g granulate. The maximum product temperature was 36 °C at the end of the process.

Product characteristic

Granular, free flowing product with a particle size under 0.7 mm.

20 Tablet composition (w/w)

Tablets were obtained by compression of a powder blend containing the granulate obtained as described above with magnesium stearate.

	Model drug substance	1.04%
25	PEG 6000	33.26 %
	Poloxamer 188	14.29 %
	Avicel PH101	50.41%
	Magnesium stearate	1.00%

30 Magnesium stearate was blended with the granulate for 0.5 minutes in a Turbulamixer.

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EK0

Tablet shape 11.5 mm doomed shape

10

15

35

Treatment B (according to the invention): tablets containing a particulate material obtained according to the method of the present invention. The tablets contain about 1% w/w of the model drug substance. The preparation of the composition used in Treatment B is described below. A treatment consisted in oral administration of 6 tablets as a single dose corresponding to approx. 37.5 mg.

Treatment C (according to the invention): tablets containing a particulate material obtained according to the method of the present invention. The tablets contain about 5% w/w of the model drug substance. The preparation of the composition used in Treatment C is described below. A treatment consisted in oral administration of 2 tablets as a single dose corresponding to approx. 42.4 mg.

Treatment D (comparison treatment): capsules containing a microemulsion of the model drug substance. Soft gelatine capsules containing 7.3 mg of the model drug substance in a vehicle consisting of 40% w/w Softigen 767, 15% w/w trietylcitrate and 45% w/w polysorbate 80 (0.05% BHA was added by weight as antioxidant). A treatment consisted of a single dose of 5 capsules, equivalent to 36.5 mg of the model drug substance.

20 Treatment E (comparison treatment): capsules containing a microemulsion of the model drug substance. Soft gelatine capsules containing 12.43 mg of the model drug substance in a vehicle consisting of 40% w/w Softigen 767, 15% w/w trietylcitrate and 45% w/w polysorbate 80 (0.05% BHA was added by weight as antioxidant). A treatment consisted of a single dose of 3 capsules, equivalent to 37.2 mg of the model drug substance.

Preparation of a pharmaceutical composition according to the invention used in Treatment B (5 mg model drug substance)

30 Preparation of a particulate material - Melt-spraying process

Starting materials
Polyethyleneglycol 6000 (Hoechst)
Poloxamer 188 (BASF)
Model drug substance

Avicel PH 101 (FMC)

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

5

10

15

25

35

Process conditions

198.0 g PEG 6000 and 85.0 g Poloxamer 188 (70:30 w/w) were melted by heating to 75 °C in a pressure tank. 6.21 g model drug substance was dissolved in the melted carriers. The melt was pumped through a heated tube (80 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.8 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

289 g of melt was sprayed on 300 g fluidized Avicel PH 101 at a flow rate of 10 g/min. The total yield was 589 g granulate. The maximum product temperature was 36 °C at the end of the process.

Product characteristic

Granular, free flowing product with a particle size under 0.7 mm.

20 Tablet composition (w/w)

Tablets were obtained by compression of a powder blend containing the granulate obtained as described above with magnesium stearate.

Model drug substance 1.04%
PEG 6000 33.26 %
Poloxamer 188 14.29 %
Avicel PH101 50.41%
Magnesium stearate 1.00%

30 Magnesium stearate was blended with the granulate for 0.5 minutes in a Turbulamixer.

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EK0 Tablet shape 11.5 mm doomed shape

Weight: 515 mg

Strength 5 mg

Mean tablet hardness (n =10) determined on a Schleuninger Model 6D apparatus was 105 N

Mean disintegration time was 21.5 minutes (Ph.Eur)
 Weight variation (n = 20) corresponded to RSD of 0.9%

Preparation of a pharmaceutical composition according to the invention used in Treatment C (20 mg model drug substance)

10

25

30

Preparation of a particulate material - Melt-spraying process

Starting materials

Polyethyleneglycol 6000 (Hoechst)

15 Poloxamer 188 (BASF)

Model drug substance

Avicel PH 101 (FMC)

Equipment

20 Fluid bed Strea-1 (Aeromatic-Fielder)

Process conditions

121.9 g PEG 6000 and 52.3 g Poloxamer 188 (70:30 w/w) were melted by heating to 75 °C in a pressure tank. 20.96 g model drug substance was dissolved in the melted carriers. The melt was pumped through a heated tube (80 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.8 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

195 g of melt was sprayed on 200 g fluidized Avicel PH 101 at a flow rate of 11.4 g/min. The total yield was 395 g granulate. The maximum product temperature was 37 °C at the end of the process.

Product characteristic

Granular, free flowing product with a particle size under 0.7 mm.

PCT/DK02/00472

43

Tablet composition (w/w)

WO 03/004001

Tablets were obtained by compression of a powder blend containing the granulate obtained as described above with magnesium stearate.

5 Model drug substance 5.26%
PEG 6000 30.54 %
Poloxamer 188 ′ 13.11 %

Avicel PH101 50.09%

Magnesium stearate

1.00%

10

Magnesium stearate was blended with the granulate for 0.5 minutes in a Turbulamixer.

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EK0

Tablet shape 11.5 mm doomed shape

Weight: 409 mg

Strength 20 mg

Mean tablet hardness (n =10) determined on Schleuninger Model 6D apparatus was

20 41 N

Mean disintegration time was 5.5 minutes (Ph.Eur)

Weight variation (n =20) corresponded to RSD of 1.3%

Study design and results

- The study design was a cross-over study, which comprised all four dogs in one group. In each of totally six weeks the dogs were dosed orally on the first day of the week following by 6 days of recovery. The first week the dogs were assigned to treatment A, second week to treatment B etc.
- Summary of pharmacokinetic parameters. Beagle dogs after single oral dosing of the model drug substance (± SD, n=4).

Treatment	Α	В	С	D	E
t _{max} (h)	2.2 ±	2.8 ±	4.3 ±	2.8 ±	2.0 ±
	0.5	0.5	3.2	1.3	0.0
C _{max} (ng/ml)	19 ± 8	52 ± 15	29 ± 17	35 ± 13	42 ± 6
AUC₀₊inf ⁸ (ng	206 ±	489 ±	290 ±	318 ±	318 ±
/ml)	108	187	184	144	65
F ^b (%)	4.8 ±	11 ± 4	5.4 ±	7.8 ±	7.6 ±
	1.9		2.7	3.8	2.9

Calculated as a AUC_{last} + C_{last}*t_{1/2, i.v.}/ In2; AUC_{0-inf,po} · D_{iv} / (AUC_{0-inf,iv} · D_{po})

From the results given above it and in fig. 5 is seen that treatment B leads to improved bioavailability compared with all other treatments employed. It is particularly interesting to note that compositions containing the model drug substance in dissolved form (treatment D and E) do not lead to a better bioavailability than treatment B and there is no significant difference in the t_{max} values obtained, i.e. the onset of the therapeutic effect is the same even if a solid composition is used. Treatment C leads to a lower bioavailability than treatment B, which may be explained by the fact that the ration between the amount of drug substance in the carrier is higher in treatment C than in treatment B (higher dose in treatment C than in treatment B).

Example 5

15

10

5

In vivo bioavailability in dogs after administration of tablets containing a particulate material obtained by the controlled agglomeration method of the present invention - proof of concept II

The present example illustrates that a composition containing a particulate material obtained according to the present invention leads to improved bioavailability after oral administration to dogs compared with compositions made by techniques that are generally accepted as useful when an increase in bioavailability is desired. In the present example compositions in the form of a nanosuspension and a cyclodextrin solution are used for comparison.

The model drug substance employed illustrates a drug substance that has a very low aqueous solubility of about $50 \,\mu g/ml$ in phosphate buffer pH 7.4. The model drug substance in this example has a pK_A of 8, a molecular weight of about 450 and a lipophilicity i.e. a log P (octanol/buffer pH 7.4) of 6.0. The model drug substance is employed in the form of a hydrochloride salt. The aqueous solubility of the salt is also very low.

The results presented below are based on absorption study in dogs comparing 6 different formulations.

10

5

Formulation A (nanosuspension)

Formulation B: Cyclodextrin solution (Captisol)

Formulation C: Mixture of SLS and the model drug substance (0.5:1)

Formulation D: Mixture of SLS and the model drug substance (1:1)

15 Formulation E: Granulate with 10% Tween 80

Formulation F: (granulate in capsule) prepared by a method according to the present invention by melt spraying and using Akosoft XP 3103.

A summary of the pharmacokinetic report on the study is given below.

20

25

30

Test formulation A was prepared by suspending nanonised model drug substance particles in a vehicle of 0.5% HPC (HPC) (Klucel® MF EP, Hercules Inc.) and purified water. A similar suspension was included in an initial study where it resulted in a mean relative bioavailability of only 0.64 when compared to a 5% Captisol® solution.

However, it was suspected that the initial suspension used was not optimal, as the particle size distribution was above the micrometer range. Subsequently, the micronisation process has been optimised, and test formulation A was prepared from a model drug substance batch, which contained particles in the nanometer range.

Reference formulation B was prepared by dissolving the model drug substance in an aqueous vehicle of 5% β -cyclodextrin sulfobutyl ether, sodium salt (Captisol®, CyDex Inc).

Test formulation C was prepared by dissolving sodium lauryl sulphate (SLS) in water and adding the solution to the model drug substance drop by drop (model drug substance /SLS w/w-ratio 2:1). The dried mixture and lactose were filled in capsules.

Test formulation D was prepared by dissolving SLS in water and adding the solution to the model drug substance drop by drop (model drug substance /SLS w/w-ratio 1:1). The dried mixture and lactose were filled in capsules.

Test formulation E was prepared by melt granulation of the model drug substance, 10% Tween 80, 2% Kollidon VA64, corn starch and lactose. The granulate was filled in capsules.

Test formulation F was prepared by a method of the invention by melt spraying the model drug substance, Akosoft 3103 and lactose. The granulate obtained was filled in capsules. Akosoft 3103 is a mixture of Akoline HH (C₈-C₁₀ monoglycerides), Akosoft 36 (hydrogenated cocoglyceride) and Akofine NF (hydrogenated cottonseed oil) from Karlshamns AB. All are saturated fats or oils, i.e. no double-bonds, PEG-chains or free acid groups exist in the excipients.

In the following the preparation of test formulation F is described in further details.

15

30

10

5

Test formulation F

Preparation of a particulate material - Melt-spraying process

Starting materials

20 Akosoft XP 3103 (Karlshamn)

Model drug substance

Lactose 350 M (DMV)

Equipment

25 Fluid bed Strea-1 (Aeromatic-Fielder)

Process conditions

153 g Akosoft XP 3103 was melted by heating to 70 °C in a pressure tank. The melt was pumped through a heated tube (80 °C) to the binary nozzle in the fluid bed at a tank pressure of 0.3 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

114 g of melt was sprayed on fluidized material consisting of 256.5 g lactose 350 M and 43.5 g model drug substance at a flow rate of 30 g/min. The total yield was 414 g granulate. The maximum product temperature was 32 °C at the end of the process.

5 Product characteristic

Granular product with a particle size under 0.7 mm.

The product was filled into capsules (500 mg corresponding to 30 mg base)

Study Design and Dosing

The study was conducted in a cross-over design. After a five days pre-dose period the test formulations were administered in intervals of three or four days. Test formulations were administered in the order B, A, C, D, E and F.

On days of dosing each dog was dosed in the morning with 30 mg of the model drug substance (with regard to the base) irrespective of bodyweight. The dose level chosen was based on previous studies with the model drug substance in Beagle dogs.

Pharmacokinetic results

20

25

Mean serum concentrations vs. time are presented in Fig. 6. Standard deviations are omitted in the figure for clarity. The data is shown in the Table below

The concentration of the model drug substance in the serum sample taken from dog F1131 at 24 hours is high compared to the concentrations observed at previous time points. Re-analysis confirmed the result and the late serum concentration increase might therefore be due to delayed absorption of the test compound.

Pharmacokinetic parameters for the model drug substance estimated by standard non-compartmental analysis are given in the following Table.

For the reference solution a mean t_{max} of 2.5 hours was observed. The other treatments resulted in mean t_{max} values of 2.3 hours (HPC - formulation A), 3.0 hours (model drug substance /SLS 2:1 - formulation C), 3.8 hours (Akosoft 3103 - formulation F), 4.8 hours (Tween 80/Kollidon VA64 - formulation E) and 8.3 hours (model drug substance/SLS 1:1 - formulation D). The latter mean t_{max} value is high

10

15

due to the extreme contribution from dog F1131 (see above). If this data point is omitted a mean t_{max} of 3.0 hours is observed.

With a mean maximum serum concentration at 123 nmol·L⁻¹ the Akosoft 3103 formulation (formulaion F) gave a value almost similar to the reference solution at 124 nmol·L⁻¹. At the other extreme the treatments with SLS (formulations C and D) resulted in mean C_{max} values of 31.5 nmol·L⁻¹ (model drug substance/SLS 2:1) and 50.3 nmol·L⁻¹ (model drug substance/SLS 1:1). Again the mean value would be smaller if the 24 hours data point for formulation D was omitted. Administration of the HPC- and Tween 80/Kollidon VA64-formulations resulted in mean C_{max} values of 87.9 nmol·L⁻¹ and 85.3 nmol·L⁻¹, respectively.

In the Table on next page are given individual and mean (n=4) pharmacokinetic parameters of the model drug substance employed in Example 5 after dosing of 30 mg to Beagle dogs. Treatment A: 0.5% HPC (aq.), Treatment B: 5% Captisol® (aq.), Treatment C: model drug substance/SLS (2:1), Treatment D: model drug substance/SLS (1:1), Treatment E: Tween 80, Kollidon VA64, corn starch and lactose, Treatment F: Akosoft® 3103.

Harmolikg hi (mmolikg)	Treatment ^a)	Animal	Dose	ا.	5	AUC	AUCAL	AUCkmethind	600	SU.	٧,/٢	F. 17.0	F
F1131 4381 2.0 62.3 617 647 641 3.7 6.1 3.9 687 37.6 F1132 4445 2.0 61.3 407 448 2.7 4.9 4.9 9.6 F1139 5016 2.0 109 751 780 4.0 <td< th=""><th></th><th></th><th>(nmol/kg)</th><th>ε</th><th>(nmol·L⁻¹)</th><th>(nmol.h.L.1)</th><th>(nmol·h·L·1)</th><th></th><th>£</th><th>(L·kg⁻¹·h⁻¹)</th><th>(L·kg.1)</th><th></th><th></th></td<>			(nmol/kg)	ε	(nmol·L ⁻¹)	(nmol.h.L.1)	(nmol·h·L·1)		£	(L·kg ⁻¹ ·h ⁻¹)	(L·kg.1)		
F 1132 4440 2.0 61.3 407 418 2.7 4.3 10.6 68.2 F 1138 4585 3.0 109 1025 1097 4.0 4.0 4.31 30.6 F 1138 4585 3.0 109 1025 1097 4.0 4.0 4.3 30.6 44.0 4.0	A	F 1131	4381	2.0	82.3	617	657	6.1	3.9	6.67	37.6	0.58	0.57
F 1139 4585 3.0 109 1025 1097 4.0 4.9 4.31 30.6 F 1139 5016 2.0 910.0 751 780 34.9 6.40 44.0 Mean 2.3 87.9 700 731 4.1 4.5 7.0 44.9 CV% 2.1 2.3 70.0 36.9 34.9 6.6 37.5 34.9 6.40 44.0 F 1138 4794 3.0 147 1163 1231 5.6 5.3 3.84 3.6 6.40 44.0 F 1139 4996 2.0 141 1160 1217 3.0 4.7 4.11 27.6 4.6 4.0		F 1132	4440	2.0	61.3	407	418	2.7	4.3	10.6	86.2	0.62	0.62
F1139 6016 2.0 99.0 751 780 37 47 840 440 CV% 21,7 23,7 37.0 731 4,1 4,5 7.0 448 F1131 4730 30 145 1163 1231 6.5 6.3 3.94 9.66 37.5 34.6 F1132 4784 3.0 145 1163 1231 6.5 6.3 3.94 29.6 34.9 9.66 37.5 34.6 37.2 34.6 37.5 34.6 37.5 34.6 37.5 34.6 37.5 34.6 37.5 34.6 37.5 34.7 44.8 37.2 34.6 37.5 34.7 44.1 45.6 37.5 34.6 37.2 37.6 44.8 37.2 37.6 44.8 37.2 37.6 44.8 37.2 37.6 44.8 37.2 37.6 44.8 37.2 37.6 44.8 47.7 44.1 47.7 44.1 47.7 <td></td> <td>F 1138</td> <td>4595</td> <td>3.0</td> <td>109</td> <td>1025</td> <td>1067</td> <td>0.4</td> <td>4.9</td> <td>4.31</td> <td>30.6</td> <td>0.85</td> <td>0.94</td>		F 1138	4595	3.0	109	1025	1067	0.4	4.9	4.31	30.6	0.85	0.94
Mean 23 87.9 700 731 4.1 4.5 7.0 44.9 CV/% 4734 23.7 23.7 13.6 13.9 3.6 4.9 94.9 94.9 91.5 3.4 4.6 4.6 7.0 44.9 F 1132 4794 3.0 144 1180 1231 3.6 4.7 4.11 27.8 F 1132 4895 2.0 141 1180 1217 3.0 4.7 4.11 27.8 F 1132 4895 2.0 144 1180 1217 3.0 4.7 4.11 27.8 F 1132 4895 2.0 124 987 1028 3.4 4.7 4.1 4.5 4.6 4.7 4.1 4.5 4.6 4.7 4.1 4.7 4.1 4.5 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 4.6 <		F 1139	5016	2.0	99.0	751	780	3.7	4.7	6.40	44.0	1.04	1.04
CV/% 21.7 22.7 37.0 36.9 34.9 9.85 37.5 34.9 39.5 34.9 39.5 34.9 39.6 37.2 37.2 1183 1731 4730 3.0 47 411 27.8 47 471 471 27.8 47 471 471 27.8 47 471 471 27.8 47 471 471 27.8 47 471 471 47.4 4		Mean		23	87.9	200	731	4.1	4.5	7.0	44.8	0.77	0.77
F 1131 4730 3.0 145 1163 1231 6.5 6.3 3.64 29.6 1132 4784 3.0 141 842 873 3.5 4.7 6.49 37.2 141 27.8 2.0 171 804 822 3.4 4.7 6.71 27.8 2.2 1.8 2.0 1.2 2.9 6.1 2.7 2.3 2.5 2.5 2.3 2.5 2.3 2.5 2.5 2.3 2.5 2.3 2.5 2.5 2.3 2.5 2.5 2.3 2.5 2		% C V		21.7	23.7	37.0	36.9	34.9	9.85	37.5	34.5	33.9	33.8
F 1132	8	F 1131	4730	3.0	145	1163	1231	5.5	6.3	3.84	29.6		٠
F 1138 4985 2.0 141 1180 1217 3.0 4.7 4.11 27.8 Mean 2.6 10.7 804 832 3.4 4.7 4.11 27.8 CV% 2.0 10.7 804 832 3.9 4.9 6.7 4.5 4.7 4.71 4.54 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.5 4.6 4.5 4.6	(reference)	F 1132	4784	3.0	5	842	873	3.5	4.7	5.49	37.2	٠	•
F 1139 5580 20 107 804 832 3.4 4.7 671 454 Mean 26 124 997 1038 3.9 4.9 50 350 CV% 23 18 20 21 29 6.1 60 350 F 1132 4794 3.0 6.89 53 68 20 4.3 73.0 465 F 1132 4794 3.0 6.89 51 73 4.9 60 35 68 20 4.3 73.0 465 F 1132 4794 3.0 6.89 51 73 30 66 88 51 73 30 66 88 51 73 4.4 4.9 60 35 66 88 51 73 4.4 4.4 4.9 60 35 66 88 51 7.3 73 4.4 4.4 4.9 60 7.2 77 78 <		F 1138	4995	2.0	141	1180	1217	3.0	4.7	4.11	27.6	•	•
Mean 26 124 997 1036 3.9 4.9 6.0 35.0 CV% 23 18 20 21 29 6.1 27 23 F 1133 4762 3.0 12.5 78 68 73 455 27 23 F 1138 6030 3.0 6.86 51 73 6.1 67.0 27 4.4 4.9 6.0 455 68 F 1138 6050 3.0 6.86 51 73 6.0 6.1 6.2 2.0 465 Kent 3.0 3.15 2.41 293 1.4 4.9 6.0 4.6		F 1139	5580	2.0	107	804	832	3.4	4.7	6.71	45.4	•	•
CV% 23 18 20 21 29 64.1 27 23 F1131 4762 3.0 125 78 95 17 41 50.2 287 F1132 4784 3.0 8.83 53 68 20 4.3 78.0 465 F1138 5680 3.0 98.0 781 687 4.4 4.8 68.3 46.2 F1138 5680 3.0 31.5 241 283 17.9 4.8 68.3 46.2 CV% 0.0 14.1 150 14.1 68.9 18.4 61.0 67.9 35.1 CV% 0.0 14.1 150 14.1 68.9 14.4 4.8 68.3 46.2 F1131 4935 3.0 2.41 2.91 339 14.4 4.8 68.9 15.0 35.1 15.0 35.1 15.0 35.1 15.0 35.1 15.0 35.1 15.		Mean		2.6	124	997	1038	3.9	4.9	6.0	35.0	١.	
F 1131 4762 3.0 12.5 7.6 865 17 4.1 50.2 297 F 1132 4784 3.0 8.63 53 6.8 53 6.8 51 73 9.6 6.1 6.3 4.6 6.6 4.3 73.0 4.65 6.8 51 73 9.6 6.1 6.8 4.3 73.0 465 6.8 6.8 761 863 46.2 4.6 46.2	•	%		ន	18	8	2	79	6.1	27	ឌ		•
F 1132 4794 3.0 6.63 53 66 6.0 4.3 73.0 456 F 1138 5030 3.0 6.89 51 73 30 6.1 69.3 608 F 1138 5680 3.0 31.5 241 283 17.9 4.9 6.0 35.1 CV% 0.0 31.5 241 283 17.9 4.9 6.0 35.2 F 1131 4730 24 32.5 32.1 610 47 4.2 68.9 F 1132 4826 2.0 34.1 5.0 4.7 4.2 68.9 F 1132 4826 2.0 34.1 5.0 4.7 4.2 68.9 F 1132 4826 3.0 27.7 236 249 5.1 4.0 6.0 1.0 Mean 1.27 7.5 236 249 5.1 4.0 4.0 4.1 4.1 4.2 6.0 1.0 <	o	F 1131	4762	3.0	12.5	78	92	17	4.1	50.2	287	90.0	0.07
F 113B 5630 3.0 6.86 51 73 30 6.1 69.3 608 Maan 3.0 31.5 241 263 17.9 4.9 8.83 46.2 CV% 0.0 141 150 141 68.9 17.9 4.9 8.0 352.1 F 1131 4730 2.4 32.5 32.1 610 4.7 61.0 67.8 F 1132 4826 2.0 34.1 291 339 14 4.7 14.2 68.9 F 1132 4826 3.0 27.7 236 249 5.1 6.2 2.0.0 150 F 1139 5537 4.0 107 913 957 4.8 4.9 6.80 4.1 Maan 8.3 50.3 440 539 17.7 6.3 6.2 20.0 150 F 1132 4856 6.0 43.2 72.1 59.0 11.7 6.8 6.3		F 1132	4784	3.0	8.63	ß	99	8	4.3	73.0	455	0.08	90.0
F 1139 5580 3.0 98.0 781 817 4.4 4.9 68.9 48.2 Mean 3.0 31.5 241 263 17.9 4.9 50 352.1 CV% 0.0 141 150 141 68.9 18.4 61.0 67.9 F 1131 4730 24 32.5 32.1 610 47 8.2 7.75 68.9 F 1132 4826 2.0 34.1 291 339 14 4.7 14.2 98.1 F 1136 553 4.0 17.7 63 4.0 6.0 16.0 F 1136 553 4.0 4.9 5.0 4.1 6.0 <td></td> <td>F 1138</td> <td>5030</td> <td>3.0</td> <td>6.86</td> <td>51</td> <td>ĸ</td> <td>စ္တ</td> <td>6.1</td> <td>69.3</td> <td>808</td> <td>0.08</td> <td>0.0 \$</td>		F 1138	5030	3.0	6.86	51	ĸ	စ္တ	6.1	69.3	808	0.08	0.0 \$
Mean 3.0 31.5 241 263 17.9 4.9 60 352.1 CV% 0.0 141 150 141 68.9 184 61.0 67.9 F 1131 4720 24 32.5 321 610 47 6.2 775 68.9 F 1132 4826 2.0 34.1 291 339 14 4.7 14.2 68.9 68.9 18.4 61.0 67.8 68.9 17.7 68.9 18.9 68.9 18.9 68.9 18.9 68.9 18.9 68.9 68.9 18.9 68.9 18.9 68.9 68.9 18.9 68.9 18.9 68.9 68.9 68.9 18.9 68.9 <td></td> <td>F 1139</td> <td>5580</td> <td>3.0</td> <td>98.0</td> <td>781</td> <td>817</td> <td>4.4</td> <td>4.9</td> <td>6.83</td> <td>48.2</td> <td>0.98</td> <td>0.97</td>		F 1139	5580	3.0	98.0	781	817	4.4	4.9	6.83	48.2	0.98	0.97
CV% 0.0 141 150 141 68.9 18.4 61.0 67.8 F 1131 4730 24 32.5 32.1 610 47 6.2 7.75 68.8 F 1132 4826 20 34.1 291 339 14 4.7 14.2 98.1 F 1138 4895 3.0 27.7 236 249 5.1 5.2 20.0 150 F 1139 5537 4.0 107 913 957 4.6 4.9 6.80 41.1 Mean 8.3 50.3 4.0 4.9 5.8 5.2 20.0 150 F 1132 4850 6.0 7.2 7.2 59.0 17.7 5.3 5.2 2.2 4.1 6.0 4.1 4.1 6.0 4.1 4.1 6.0 4.1 4.1 6.0 4.1 4.1 6.0 4.1 4.1 6.0 4.1 4.1 6.0 4.1 4.0<		Mean		3.0	31.5	241	263	17.9	4.9	20	352.1	0.30	0.29
F 1131 4730 24 32.5 321 610 47 6.2 7.75 68.9 F 1132 4826 2.0 34.1 291 339 14 4.7 14.2 98.1 F 1132 4826 2.0 34.1 291 339 14 4.7 14.2 98.1 F 1138 4895 3.0 27.7 236 249 5.1 5.2 20.0 150 Mean 8.3 6.0.3 440 539 17.7 6.3 12 89.0 CV% 127 76.3 72.1 59.0 113 12.6 64.3 65.1 66.3 67.1 67.2 64.3 65.2 67.0 67.2 77.1 69.0 41.1 67.2 67.3 67.2 67.3 67.2 67.3 67.2 67.3 67.2 67.0 67.3 67.2 67.0 67.3 67.2 67.3 67.2 67.3 67.2 67.3 67.2		% S		0.0	141	150	141	68.9	18.4	61.0	67.9	161	168
F 1132 4828 2.0 34.1 291 339 14 4.7 14.2 98.1 F 1138 4985 3.0 27.7 238 249 5.1 5.2 20.0 160 F 1139 5537 4.0 107 913 957 4.8 4.9 58.0 17.7 6.3 12 80.0 CV% 127 76.3 72.1 59.0 113 12.6 64.3 52.2 F 1131 4828 6.0 43.2 575 752 24 10 64.2 86.3 F 1132 4859 6.0 78.8 802 835 4.0 4.5 58.2 38.1 F 1138 5530 3.0 10.2 956 1015 5.8 4.0 4.5 5.8 38.1 F 1138 5530 3.0 17.7 2.8 4.0 9.8 6.5 4.9 5.0 37.4 Mean 4.0 11.7	٥	F 1131	4730	24	32.5	321	610	47	6.2	7.75	68.9	0.11	0.28
F 113B 4985 3.0 27.7 236 249 5.1 5.2 20.0 160 F 1139 5537 4.0 107 913 957 4.6 4.9 6.0 41.1 Mean 6.3 6.0.3 440 539 17.7 6.3 12 88.0 CV% 127 76.3 72.1 59.0 113 12.6 64.3 52.2 F 1131 4828 8.0 43.2 575 752 24 10 6.42 86.4 F 1132 4859 6.0 78.8 802 835 4.0 4.5 5.82 38.1 F 1132 5630 3.0 105 1015 5.8 5.4 6.5 4.85 80.3 F 1138 5637 4.0 117 1058 1118 5.3 5.5 5.0 37.4 Mean 4.6 86.3 4.0 4.4 5.7 5.3 3.7 2.5		F 1132	4826	50	34.1	291	339	4	4.7	14.2	98.1	0.27	0.23
F 1139 5537 4,0 107 913 957 4,6 4,9 5,80 41.1 Mean 8,3 50.3 440 539 17.7 6.3 12 68.0 CV% 127 76.3 72.1 59.0 113 12.6 64.3 52.2 F 1131 4826 6.0 78.8 802 835 4.0 4,5 58.2 38.1 F 1132 4859 6.0 78.8 802 835 4.0 4,5 5.82 38.1 F 1132 4859 6.0 78.8 802 835 4.0 4,5 5.82 38.1 F 1132 5630 3.0 105 1118 5.3 5.2 5.0 37.4 Mean 4,6 3.0 11,1 10.6 17.9 9.1 9.8 6.3 5.5 5.0 37.4 F 1132 4862 4.0 17.9 9.1 17.9 9.1 12.8		F 1138	4895	3.0	27.7	236	249	5.1	5.2	20.0	150	0.20	0.20
Mean 8.3 50.3 440 539 17.7 6.3 12 89.0 CV% 127 76.3 72.1 59.0 113 12.6 54.3 52.2 F 1131 4826 8.0 78.3 802 835 4.0 4.5 58.2 38.1 F 1132 4859 6.0 78.8 802 835 4.0 4.5 5.82 38.1 F 1138 5030 3.0 102 956 1016 5.8 5.6 4.95 38.1 F 1136 5637 4.0 117 1068 1118 5.3 5.2 5.0 37.4 Mean 4.6 86.3 6.2 5.0 37.4 5.3 5.2 5.0 37.4 F 1132 4762 3.0 152 1334 1414 5.7 5.3 3.7 25.6 5.2 5.0 37.4 5.1 4.4 5.0 5.1 5.1 5.1 5.1		F 1139	5537	4.0	107	913	957	4.8	4.9	6.80	41.1	1.18	1.14
CV% 127 76.3 72.1 59.0 113 12.6 64.3 52.2 F 1131 4826 8.0 43.2 575 752 24 10 64.2 96.4 F 1132 4859 6.0 78.8 802 835 4.0 4.5 5.82 38.1 F 1136 5030 3.0 102 966 1015 5.8 5.5 4.95 38.1 F 1139 5637 4.0 117 1058 1118 5.3 5.2 5.00 37.4 Mean 4.8 86.3 848 930 9.8 6.3 5.6 5.00 37.4 F 1132 4762 3.0 152 13.4 17.9 97.1 39.7 12.8 5.6 5.0 37.4 F 1132 4826 4.0 16.2 13.4 5.7 5.3 3.3 5.6 5.6 5.6 5.6 5.6 5.6 5.6 5.6 5.6		Mean		8.3	50.3	440	539	17.7	5.3	12	89.0	0.44	0.46
F 1131 4826 6.0 43.2 575 752 24 10 6.42 96.4 F 1132 4859 6.0 78.8 802 835 4.0 4.5 5.82 38.1 F 1138 5030 3.0 102 956 1015 5.8 5.5 4.85 38.1 F 1139 5637 4.0 17 1058 1118 5.3 5.2 5.00 37.4 Mean 4.8 86.3 848 930 9.8 6.3 6.5 5.00 37.4 F 1131 4762 3.7 24.8 17.9 97.1 38.7 12.8 5.4 5.0 37.4 F 1132 4826 4.0 16.2 13.3 14.4 5.7 5.3 3.5 5.6 5.6 5.6 5.5 5.6 5.6 5.6 5.6 5.6 5.6 5.6 5.2 5.0 5.7 5.6 5.2 5.6 5.2 5.6		% %		127	75.3	72.1	59.0	113	12.6	54.3	52.2	111	98.5
F 1132 4859 6.0 78.8 802 835 4.0 4.5 5.82 38.1 F 1138 5030 3.0 102 956 1015 5.8 5.5 4.95 38.1 F 1139 5537 4.0 117 1058 1118 5.3 5.2 5.00 37.4 Mean 4.8 86.3 84.8 930 9.8 6.3 6.5 5.5 5.5 5.5 5.00 37.4 F 1131 4762 3.0 162 1834 1414 6.7 6.3 6.5 5.5 5.5 5.5 5.5 5.5 5.5 5.2 5.00 37.4 5.0 5.2 5.00 37.4 5.0 5.5 5.2 5.0 37.4 5.5 5.2 5.0 5.5 5.2 5.0 5.5 5.5 5.2 5.0 5.5 5.2 5.2 5.0 3.3 7.0 5.0 5.5 5.2 5.2 5.0 <t< td=""><td>ш</td><td>F 1131</td><td>4826</td><td>8.0</td><td>43.2</td><td>575</td><td>752</td><td>24</td><td>10</td><td>6.42</td><td>95.4</td><td>0.60</td><td>0.48</td></t<>	ш	F 1131	4826	8.0	43.2	575	752	24	10	6.42	95.4	0.60	0.48
F 1138 5030 3.0 102 956 1016 5.8 5.5 4.86 39.0 F 1139 5537 4.0 117 1058 1118 5.3 5.2 5.00 37.4 Mean 4.8 86.3 846 830 9.8 6.3 5.6 5.2 F 1131 4762 3.0 162 1334 1414 5.7 5.3 3.37 25.6 F 1132 4826 4.0 99.1 839 867 3.3 4.4 5.6 35.1 40.1 F 1132 553 4.0 88.1 88.1 926 4.8 5.0 5.51 40.1 F 1132 553 4.0 18.1 130 120 4.8 4.8 5.6 35.1 40.1 F 1132 553 4.0 18.1 120 120 4.8 4.8 4.3 35.1 40.1 F 1138 5537 4.0 15.2 1068		F 1132	4859	6.0	78.8	802	835	4.0	4.5	5.82	38.1	0.94	0.94
F 1139 5637 4,0 117 1058 1118 5.3 5.2 5.00 37.4 Mean 4,8 85.3 848 930 9.8 6.3 5.6 52.5 CV% 31.3 37.7 24.8 17.9 97.1 39.7 12.8 54.5 F 1132 4826 4.0 99.1 839 667 3.3 4.4 5.6 35.1 40.1 F 1132 4826 4.0 99.1 88.1 926 4.8 5.0 5.51 40.1 F 1138 5102 4.0 153 1210 1266 4.4 4.8 4.37 30.1 Mean 3.8 123 1068 1118 4.6 4.9 4.7 32.7 CV% 13.2 27.9 22.9 23.6 21.6 22.2 19.2		F 1138	5030	3.0	102	926	1015	5.8	5.5	4.95	39.0	0.83	0.80
Mean 4,8 85.3 848 930 9,8 6.3 5.5 52.5 CV% 31.3 37.7 24.8 17,9 97.1 39.7 12.8 54.5 F 1132 4826 4.0 99.1 839 667 3.3 4.4 5.6 35.1 40.1 F 1132 4826 4.0 99.1 881 926 4.8 5.0 5.51 40.1 F 1138 5102 4.0 153 1210 1266 4.4 4.8 4.37 30.1 Mean 3.8 123 1068 1118 4.6 4.9 4.7 32.7 CV% 13.2 27.9 22.9 23.6 21.6 7.70 22.2 19.2		F 1139	5537	4.0	117	1058	1118	5.3	5.2	5.00	37.4	1.35	1.33
CV% 31.3 37.7 24.8 17.9 97.1 39.7 12.6 54.5 F 1131 4762 3.0 162 1834 1414 5.7 5.3 3.37 25.6 F 1132 4826 4.0 99.1 839 667 3.3 4.4 5.6 35.1 40.1 F 1138 5102 4.0 88.1 88.1 926 4.8 5.0 5.51 40.1 F 1139 5537 4.0 153 1210 1266 4.4 4.8 4.37 30.1 Mean 3.8 123 1068 1118 4.6 4.9 4.7 32.7 CV% 13.2 27.9 22.9 23.6 21.6 7.70 22.2 19.2		Mean		4.8	85.3	848	930	9.8	6.3	5.6	52.5	0.93	0.89
F 1131 4762 3.0 162 1834 1414 6.7 6.3 3.37 25.6 F 1132 4826 4.0 99.1 839 667 3.3 4.4 6.68 36.1 F 1138 6102 4.0 88.1 88.1 88.1 826 4.8 5.0 5.61 40.1 F 1139 5537 4.0 153 1210 1266 4.4 4.8 4.37 30.1 Mean 3.8 123 1068 1118 4.6 4.9 4.7 32.7 CV% 13.2 27.9 22.9 23.6 21.6 7.70 22.2 19.2		% S		31.3	37.7	24.8	17.9	97.1	39.7	12.8	54.5	33.7	39.6
4826 4.0 99.1 839 867 3.3 4,4 6.66 36.1 5102 4.0 88.1 881 928 4.8 5.0 5.51 40.1 5537 4.0 153 1210 1266 4,4 4.8 4.37 30.1 3.8 123 1086 1118 4.6 4.9 4.7 32.7 13.2 27.9 22.9 23.6 21.8 7.70 22.2 19.2	u.	F 1131	4762	3.0	152	1334	1414	5.7	5.3	3.37	25.6	1.14	1.14
6102 4.0 88.1 881 926 4.8 5.0 5.51 40.1 5537 4.0 153 1210 1266 4.4 4.8 4.37 30.1 3.8 123 1086 1118 4.6 4.9 4.7 32.7 13.2 27.9 22.9 23.6 21.8 7.70 22.2 19.2		F 1132	4826	4.0	99.1	839	198	හ හ	4.4	5.58	36.1	0.99	0.99
5537 4,0 153 1210 1266 4,4 4,8 4,37 30.1 3.8 123 1086 1118 4,6 4,9 4,7 32.7 13.2 27.9 22.9 23.6 21.8 7.70 22.2 19.2		F 1138	5102	4.0	88.1	881	926	8.4	9.0	5.51	40.1	0.74	0.73
3.8 123 1086 1118 4.6 4.9 4.7 32.7 13.2 27.9 22.9 23.6 21.8 7.70 22.2 19.2		F1139	5537	4.0	153	1210	1266	4.4	4.8	4.37	30.1	1.53	1.52
13.2 27.9 22.9 23.8 21.8 7.70 22.2 19.2		Mean		3.8	123	1088	1118	4.6	4.9	4.7	32.7	1.10	1.10
		% S		13.2	27.9	22.9	23.6	21.6	7.70	22.2	19.2	30.0	31.0

WO 03/004001 PCT/DK02/00472

Individual doses used in the pharmacokinetic analysis were calculated by D \cdot CF / M_w \cdot BW; D is the dose administered with respect to the base (ng), M_w is the molecular weight of the model drug substance (ng/nmol), BW is the body weight of the animal (kg) and CF is the correction factor determined from analysis of the test formulations.

5

15

20

 $t_{1/2}$ was calculated from λ -values estimated from data points at 2 - 8 hours (I), 2 - 12 hours (II), 2 - 24 hours (III), 3 - 12 hours (IV), 3 - 24 hours (V), 4 - 24 hours (VI), 6 - 12 hours (VII) and 6 - 24 hours (VIII)

10 $F_{rel, inf}$ was calculated as $F_{rel} = AUC_{0-inf}^{test} \cdot Dose^{ref} / AUC_{0-inf}^{ref} \cdot Dose^{test}$ $F_{rel, t}$ was calculated as $F_{rel} = AUC_{0t}^{test} \cdot Dose^{ref} / AUC_{0t}^{ref} \cdot Dose^{test}$

Mean values for the relative bioavailability (relative to cyclodextrin solution) were almost identical irrespective of the calculation being made with respect to the serum concentration time curve to infinity (AUC_{0-inf}) or to the last measurable concentration (AUC_{0-i}). Mean values for the latter AUC parameter were 997 nmol·h·L⁻¹ (reference formulation), 1066 nmol·h·L⁻¹ (Akosoft 3103), 848 nmol·h·L⁻¹ (Tween 80/Kollidon VA64), 700 nmol·h·L⁻¹ (HPC), 440 nmol·h·L⁻¹ (model drug substance/SLS 1:1) and 241 nmol·h·L⁻¹ (model drug substance /SLS 2:1). The low values for the two SLS formulations are in line with the low C_{max} values observed for these formulations.

The corresponding mean relative bioavailability-values were 1.10 (Akosoft 3103), 0.89 (Tween 80/Kollidon VA64), 0.77 (HPC), 0.46 (model drug substance /SLS 1:1) and 0.29 (model drug substance /SLS 2:1).

25

30

35

The low relative bioavailability observed for the two SLS-formulations was not expected as a similar formulation, albeit with a model drug substance /SLS-ratio at 2:1, administered in a previous study resulted in a mean relative bioavailability of 1.20. Apparently there is a critical concentration below which the dissolution- and absorption enhancing properties of SLS are limited.

All formulations administered to animal F 1039 resulted in a relative bioavailability (based on AUC_{0-inf}) around or above unity (range 0.98-1.53). The relative bioavailability determined in this dog for the different formulations therefore contributes considerably to the mean F_{rel} . This is especially the case for the two SLS

formulations where the relative bioavailability is very low for the other three dogs. When this dog was excluded mean values of 0.24 and 0.06 were found for model drug substance /SLS-ratios of 1:1 and 2:1, respectively.

- The mean apparent half life determined after administration of the various treatments were 4.5 hours (HPC suspension), 4.8 hours (5% Captisol® and model drug substance /SLS 2:1), 4.9 hours (Akosoft 3103), 5.2 hours (model drug substance /SLS 1:1) and 6.4 hours (Tween 80/Kollidon VA64). Mean oral clearances (CL/F) were comparable for treatments with HPC (7.01 L·kg⁻¹·h⁻¹), 5% Captisol® (5.04 L·kg⁻¹·h⁻¹), Tween 80/Kollidon VA64 (5.54 L·kg⁻¹·h⁻¹) and Akosoft 3103 (4.70 L·kg⁻¹·h⁻¹). As a consequence of the low AUC_{0-inf} values the two treatments with SLS show relatively high CL/F values at 12 L·kg⁻¹·h⁻¹ (model drug substance /SLS 1:1) and 50 L·kg⁻¹·h⁻¹ (model drug substance /SLS 2:1).
- Mean volumes of distribution (V_z/F) observed were 29.6 L·kg⁻¹ (HPC), 32.7 L·kg⁻¹ (Akosoft 3103), 34.9 L·kg⁻¹ (5% Captisol[®]) and 52.5 L·kg⁻¹ (Tween 80/Kollidon VA64). Again the values for the two SLS formulations were relatively higher at 158 L·kg⁻¹ and 352 L·kg⁻¹.
- 20 Pharmacokinetic parameters estimated for the reference solution were consistent with values found in a previous formulation study performed on identical animals.
 - As supplement to these data other formulations have been prepared including Captisol formulations: B (similar to the one in the previous study), and three formulations prepared according to the invention, formulation G, H and I. These formulations include mixtures of glycerides. Formulations G, H and I (granulate in capsule) have been manufactured by melt spraying.
 - Preparation of Test formulation G, H and I according to the invention

 Preparation of a particulate material Melt-spraying process

Starting materials

25

30

Kirnol C 8-50 (Mono-diglycerid on medium chain fatty acids) (Cognis) Viscoleo (medium chain triglycerides) (Grünau Illertissen)

35 Rylo MG 18 Pharma (Danisco Cultor)

Sodium lauryl sulfate (Millchem Limited)

Ascorbyl palmitate (Merck)

Model drug substance (the same substance is used throughout Example 5) Lactose 350 M (DMV)

5

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

Compositions

Material	Formulation	Formulation H	Formulation I
	G	g	\boldsymbol{g}
	g		
Rylo MG 18	25.8	25.8	25.8
Viscoleo	21.2	21.2	21.2
Kimol	21.2	21.2	21.2
Model drug	50.2	50.2	25.1
Lactose 350 M	202.1	248.1	275.7
SLS	46.0	-	-
Ascorbyl	1.8	1.8	1.8
palmitate			

10

15

20

Process conditions

The process conditions are similar for the formulation G, H and I.

Rylo MG 18 was melted by heating to 70 °C in a pressure tank and the liquids Viscoleo and Kirnol were added. The melt was pumped through a heated tube (80 °C) to the binary nozzle in the fluid bed at a tank pressure of 0.2 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

The melt was sprayed on fluidized material consisting of the particulate materials, which include the model drug substance, lactose and ascorbyl palmitate and for formulation G; sodium lauryl sulfate. The flow rate was 20- 30 g/min. The maximum product temperature was 32 °C at the end of the process.

Product characteristic

Granular product with a particle size under 0.7 mm.

The product was filled into capsules (250 mg corresponding to 30 mg base for Formulation G and H). 500 mg corresponding to 30 mg base for formulation I.

5

Example 6

Proof of concept based on data from development project with NifedIpine

Nifedipine is a yellow crystalline substance, practically insoluble in water with a solubility of < 56 mg/L at 25 °C. It has a molecular weight of 346.3 and a melting range between 172-174 °C. The calculated log P is 2.5 and the experimental measured value is 2.2. Nifedipine is rapidly and fully absorbed after oral administration of the marketed products, however an immediate release capsule only produce a bioavailability between 30 and 60%.

Proof of concept is based on a comparison of bioavailability of different oral formulations with a solution of the drug substance as reference, in dogs in a cross over design. A summary is given below including detailed information on the melt spraying process and tabletting (Treatment B and C)

Treatment A

Solution of nifedipine in PEG 400

25 Composition

Nifedipine

2 % w/w

PEG 400

98% w/w

1 ml per capsule (corresponds to 20 mg nifedipine)

30

20

Treatment B

Plain tablet 20 mg Adalat® Bayer

Treatment C

Tablets prepared from a particulate material produced according to the present invention by melt spraying. Nifedipine is contemplated to be present in

5 PEG/poloxamer as a solid solution.

Melt-spraying process

Starting materials

10 Polyethyleneglycol 6000 (Hoechst)

Poloxamer 188 (BASF)

Nifedipine (Sigma-Aldrich)

Lactose 200 mesh (DMV)

15 Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

Process conditions

264.6 g PEG 6000 and 113.4 g Poloxamer 188 (70:30 w/w) were melted by heating to 90 °C in a pressure tank. 15.27 g drug substance was dissolved in the melted carriers. The melt was pumped through a heated tube (85 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.6 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

25 308 g of melt was sprayed on 300 g fluidized lactose at a flow rate of 17 g/min. The total yield was 608 g granulate. The maximum product temperature was 37 °C at the end of the process.

Product characteristic

30 Granular, free flowing product with a particle size under 0.7 mm

Tablet composition

Nifedipine

1.94 % w/w

PEG 6000

33.71 % w/w

35 Poloxamer 188

14.45 % w/w

WO 03/004001 PCT/DK02/00472

Avicel PH101 48.90% w/w
Magnesium stearate 1.00% w/w

Magnesium stearate was blended with the granulate for 0.5 minutes in a Turbula-5 mixer.

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EK0 Tablet shape 8 mm compound shape

Weight: 260 mgStrength 5 mg

Mean tablet hardness (n =10) determined on a Schleuniger model 6D was 97 N Mean disintegration time was 11.3 minutes (Ph.Eur)

15 Weight variation (n =20) corresponded to RSD of 1.15 %

Dosing 4 tablets (20 mg) in a capsule

Dosing

One dog was dosed with the 3 different formulations A, B and C with 3 days between dosing. 2 ml of blood samples were taken at pre-dose and 0.25, 0.5, 1, 1.5, 2, 4, 8 and 24 hours after administration. The analysis of nifedipine was performed on respective plasma samples.

25 Pharmacokinetic results

The pharmacokinetic data are shown in the Table below

Formulation	A	В	С	
T _{max} (h)	0.5	0.5	1.0	
C _{max} (ng/ml)	66.6	22.0	61.0	
AUC _{0-inf} ^a (ng	172.2	22.2	53.1	
h/ml)				
F _{rel} ^b (%)	100	12.9	30.8	

Calculated as aAUC_{last}+C_{last} / \(\lambda_z\); bAUC_{0-inf,po} * D_{ref} / (AUC_{0-inf,ref} * D_{po})

The bioavailability F_{rel} is calculated relative to formulation A, representing a solution of nifedipine in PEG 400. The corresponding plasma profiles are shown in Figure 7.

Conclusion

Apparently the solid solution of nifedipine in PEG6000/Poloxamer (formulation C) results in significant higher bioavailability compared to a plain tablet formulation (Adalat).

Example 7

10

15

20

30

Neusilin as absorption material in controlled agglomeration

Background

It is established that magnesium aluminium silicate (Carrisorb, Gelsorp, Magnabite) is suitable in absorption of liquids and commonly used as a viscosity increasing, a tablet disintegrant and a tablet binding agent.

Neusilin (Fuji Chemical Industries) is a magnesium aluminometasilicate based on a polymeric reaction of sodium silicate having a siloxane structure (US-patent 3,959,444) in combination with a mixture or sodium aluminate and magnesium salts.

Neusilin US2 is a spray dried free flowing material with a particle size of approx. 80 μ m and a specific surface area of 300 m²/g.

Two experiments (A and B) have been performed where PEG 6000 is sprayed on fluidized Neusilin in a fluid bed Strea-1.

Experiment A is performed under conditions of controlled agglomeration keeping the temperature difference over 10 °C between the product and the melting point of PEG 6000 (59 °C).

Experiment B is performed under heating condition of the inlet air (50-70 °C) resulting in a product temperature under the 10 °C temperature difference.

Experiment A

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

5

10

15

25

Process conditions

1000 g PEG 6000 was melted by heating to 90 °C in a pressure tank. The melt was pumped through a heated tube (85 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.5 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 22 °C.

584 g of melt was sprayed on 150 g fluidized Neusilin US2 at a flow rate of 19 g/min. The total yield was 734 g granulate. The maximum product temperature was 45 °C at the end of the process. The concentration of PEG 6000 in the particulate material obtained was 79.6% w/w.

Product characteristic

Granular, free flowing product with a particle size d_{gw} of 409 μ m.

Tablet composition

20 PEG 6000

79.6 %

Neusilin

20.4 %

Tabletting and tablet characteristics

The tabletting was performed on a single punch tabletting machine Korsch EK0. It was not necessary to add further excipients for the tabletting procedure.

Tablet shape 8 mm compound cup

Weight: 200 mg

Mean tablet hardness (n =10) determined on a Schleuniger model 6D was 48.6 N

Mean disintegration time was 22.4 minutes (Ph.Eur)

Weight variation (n =20) corresponded to RSD of 0.6%

Experiment B

Equipment

Fluid bed Strea-1 (Aeromatic-Fielder)

5

Process conditions

800 g PEG 6000 was melted by heating to 90 °C in a pressure tank. The melt was pumped through a heated tube (85 °C) to the binary nozzle in the fluid bed at a tank pressure of 1.5 Bar. The atomizing air was heated to 140 °C. The inlet air temperature of the fluid bed was 60 °C.

505~g of melt was sprayed on 150~g fluidized Neusilin US2 at a flow rate of 19~g/min. The total yield was 655~g granulate. The maximum product temperature was 58° C at the end of the process.

15

10

Product characteristic

Granular, free flowing product with a particle size under 0.7 mm.

Tablet composition

20 PEG 6000

77.1 %

Neusilin

22.9 %

Tabletting and tablet characteristics

Tabletting was not possible due to adhesion to the punches.

25

Conclusion

Neusilin US2 acts as an absorption agent for the melted carrier sprayed on the fluidized material.

Surprisingly high amount of carrier was applicable corresponding to a total amount of carrier exceeding 80% without getting uncontrolled agglomeration. In Experiment A, the temperature difference between product and melting point of the carrier exceeded 10 °C. Further, direct tabletting of the product without adding lubricant was successfully performed.

Increasing the inlet temperature of the fluidized bed (Experiment B) exceeding the temperature limits for controlled agglomeration (recognized for the traditionally employed excipients) did not result in un-controlled agglomeration as expected. This is most likely due to the high absorption capacity of Neusilin preventing free surface liquid to form bondings between the fluidized particles. However, uncontrolled agglomeration occurred at the end of the process (77.1% PEG 6000). Direct compression of the product was not possible due to adhesion to the punches indicating surface free PEG in the agglomerates, which might be due to the elevated product temperature in the agglomeration process.

10

5

To sum up, it is possible to obtain controlled agglomeration even in those cases where no or only a small temperature difference is present between the carrier and the second composition. This applies especially for substances like Neusilin and the like.

15 Example 8

Lubricant effect of Neusilin in comparison with magnesium stearate and Aerosil 200

A sticky granulate was produced by controlled agglomeration. PEG 1500 (melting 20 range of from about 44 to about 48 °C) was applied on lactose 200 mesh in a fluid bed Strea-1. The composition of the product was as follows:

Lactose 200 mesh

300 g

PEG 1500

200 g

25

30

The granulate was sieved through a 0.71 mm mesh size.

A part of the granulate was blended with the different substances for 3 minutes in a Turbula mixer in order to determine any lubricating effect. Two of the substances used, namely magnesium stearate and Aerosil, are known lubricants. The substances employed were:

Neusilin ULF2 (Fuji Chemical Industries)

Magnesium stearate (Magnesia GmbH)

Aerosil 200 (colloidal silicon dioxide), (Degussa AG)

Tablets were produced on a single punch tabletting machine Korsch EK0, instrumented with force transducer on the filling device measuring the force to push off the tablet from the lower punch.

Tablet diameter 8 mm. Tablet shape: Compound cup

5 Tablet weight: 200 mg

The results are summarised in the Table below

Lubricant	Conc. %	Adhesion	Mean Push off force
		to tablet	N
	•	punches	
Neusilin	2	no	4.5
	4	no	1.1
Mg-stearate	1	Adhesion	n.m.
Aerosil 200	0.5	Adhesion	n.m
	1	Adhesion	n.m

10

15

20

25

Conclusion

Neusilin and Aerosil provided excellent flowability to the sticky granular product, whereas magnesium stearate did not have this effect. Aerosil is normally used as lubricant in the concentrations below 0.5% and is primarily used to improve the flowability of cohesive materials.

The anti-adhesive property of Neusilin is superior to both magnesium stearate and Aerosil. Granules blended with either 2 or 4% of Neusilin was compressed without any adhesion to the punches. As shown in the Table the adhesion to the lower punch was significantly decreased when increasing the concentration of Neusilin from 2 to 4%. The push off force was not monitored (n.m.) for the other lubricants since compression of tablets was not possible due to immediately adhesion to the punches.

Thus, the results demonstrate that Neusilin is an excellent lubricant having antiadhesive properties.

CLAIMS

- 1. A process for the preparation of a particulate material, the method comprising
- spraying a first composition comprising a carrier, which has a melting point of about 5 °C or more such as, e.g., about 10 °C or more, about 20°C or more or about 25 °C or more and which is present in the first composition in liquid form, on a second composition comprising a material in solid form, the second composition having a temperature of at the most a temperature corresponding to the melting point of the carrier and/or of the carrier composition such as, e.g., a temperature of at least about 2 °C, at least about 5 °C or at least about 10 °C lower than the melting point of the carrier and/or of the carrier composition, and
 - ii) mixing or other means of mechanical working the second composition onto which the first composition is sprayed to obtain the particulate material.
 - A process according to claim 1, wherein the process is carried out in a high or low shear mixer or in a fluid bed.
 - A process according to claim 1 or 2, wherein the process is carried out in a fluid bed and the spraying of the carrier composition is performed on the second composition in a fluidised state.

25

30

35

20

- 4. A process according to claims 1 or 2, wherein the spraying is performed through a spraying device equipped with temperature controlling means.
- 5. A process according to any of the preceding claims, wherein the particulate material obtained has a geometric weight mean diameter d_{gw} of ≥10 μm such as, e.g. ≥20 μm, from about 20 to about 2000, from about 30 to about 2000, from about 50 to about 2000, from about 60 to about 2000, from about 75 to about 2000 such as, e.g. from about 100 to about 1500 μm, from about 100 to about 1000 μm or from about 100 to about 700 μm, or at the most about 400 μm or at the most 300 μm such as, e.g., from about 50 to about 400 μm such as, e.g., from about 50

5

10

20

25

35

to about 350 μ m, from about 50 to about 300 μ m, from about 50 to about 250 μ m or from about 100 to about 300 µm.

- 6. A process according to any of the preceding claims, wherein the concentration of the carrier in the particulate material is from about 5 to about 95% v/v such as, e.g. from about 5 to 90% v/v, from about 5 to about 85% v/v, from about 5 to about 80% v/v, from about 10 to about 75% v/v, from about 15 to about 75% v/v, from about 20 to abut 75% v/v, from about 25% to about 75% v/v, from about 30% to about 75% v/v, from about 35% to about 75% v/v, from about 25% to about 70% v/v, from about 30% to about 70% v/v, from about 35% to abut 70 % v/v, from about 40% to about 70% v/v, from about 45% to about 65% v/v or from about 45% to about 60% v/v.
- 7. A process according to any of the preceding claims, wherein the carrier 15 composition is brought on liquid form by heating the carrier and/or the carrier composition to a temperature, which causes the carrier and/or the carrier composition to melt.
 - 8. A process according to claim 7, wherein the carrier and/or the carrier composition in liquid form has a viscosity (Brookfield DV-III) of at the most about 800 mPas at a temperature of at the most 100 °C such as, e.g., at the most 700, at the most 600, at the most 500 mPas.
 - 9. A process according to any of the preceding claims, wherein the carrier composition is essentially non-aqueous and it contains at the most about 20% w/w water such as at the most about 15% w/w, at the most abut 10% w/w, at the most about 5% w/w or at the most about 2.5% w/w.
- 10. A process according to any of the preceding claims, wherein the carrier has a melting point of at least about 30 °C such as, e.g., at least about 35 °C or at least 30 about 40 °C.
 - 11. A process according to any of the preceding claims, wherein the carrier has a melting point of at the most about 300 °C such as, e.g., at the most about 250 °C, at the most about 200 °C, at the most about 150°C or at the most about 100 °C.

- 12. A process according to any of the preceding claims, wherein the carrier is a hydrophilic carrier, a hydrophobic carrier, a surfactant or mixtures thereof.
- 13. A process according to claim 12, wherein the carrier is selected from the group consisting of: polyether glycols such as, e.g., polyethylene glycols, polypropylene glycols; polyoxyethylenes, polyoxypropylenes; poloxamers and mixtures thereof.
 - 14. A process according to claim 12, wherein the carrier is selected from the group consisting of: xylitol, sorbitol, potassium sodium tartrate, sucrose tribehenate, glucose, rhamnose, lactitol, behenic acid, hydroquinon monomethyl ether, sodium acetate, ethyl fumarate, myristic acid, citric acid, Gelucire 50/13, Gelucire 44/14, Gelucire 50/10, Gelucire 62/05, Sucro-ester 7, Sucro-ester 11, Sucro-ester 15, maltose, mannitol and mixtures thereof.

20

10

15. A process according to claim 12, wherein the carrier is selected from the group consisting of: straight chain saturated hydrocarbons, sorbitan esters paraffins; fats and oils such as e.g., cacao butter, beef tallow, lard, polyether glycol esters; higher fatty acid such as, e.g. stearic acid, myristic acid, palmitic acid, higher alcohols such as, e.g., cetanol, stearyl alcohol, low melting piont waxes such as, e.g., glyceryl monostearate, hydrogenated tallow, myristyl alcohol, stearyl alcohol, substituted and/or unsubstituted monoglycerides, substituted and/or unsubstituted diglycerides, substituted and/or unsubstituted triglycerides, yellow beeswax, white beeswax, carnauba wax, castor wax, japan wax, acetylate monoglycerides; NVP polymers, PVP polymers, acrylic polymers, or a mixture thereof.

25

30

16. A process according to any of claims 1-12, wherein the carrier is polyethylene glycol having an average molecular weight in a range of from about 400 to about 35,000 such as, e.g., from about 800 to about 35,000, from about 1,000 to about 35,000 such as, e.g., polyethylene glycol 1,000, polyethylene glycol 2,000, polyethylene glycol 3,000, polyethylene glycol 4,000, polyethylene glycol 5,000, polyethylene glycol 6000, polyethylene glycol 7,000, polyethylene glycol 8,000, polyethylene glycol 9,000 polyethylene glycol 10,000, polyethylene glycol 15,000, polyethylene glycol 20,000, or polyethylene glycol 35,000.

- 17. A process according to any of claims 1-12, wherein the carrier is polyethylene oxide having a molecular weight of from about 2,000 to about 7,000,000 such as, e.g. from about 2,000 to about 100,000, from about 5,000 to about 75,000, from about 10,000 to about 60,000, from about 15,000 to about 50,000, from about 20,000 to about 40,000, from about 100,000 to about 7,000,000 such as, e.g., from about 100,000 to about 1,000,000, from about 100,000 to about 600,000, from about 100,000 to about 300,000.
- 18. A process according to any of claims 1-12, wherein the carrier is a poloxamer such as, e.g. Poloxamer 188, Poloxamer 237, Poloxamer 338 or Poloxamer 407.
 - 19. A process according to any of claims 1-12, wherein the carrier is a sorbitan ester such as, e.g., sorbitan di-isostearate, sorbitan dioleate, sorbitan monolaurate, sorbitan monoisostearate, sorbitan monooleate, sorbitan monopalmitate, sorbitan monostearate, sorbitan sesqui-isostearate, sorbitan sesquioleate, sorbitan sesquistearate, sorbitan tri-isostearate, sorbitan trioleate, sorbitan tristearate or mixtures thereof.
- 20. A process according to any of the preceding claims, wherein the carrier
 composition comprises a mixture of hydrophilic and/or hydrophobic carriers.
 - 21. A process according to any of the preceding claims, wherein the carrier composition comprises one or more therapeutically and/or prophylactically active substances.

30

5

10

15

- 22. A process according to any of the preceding claims, wherein the carrier composition comprises one or more pharmaceutically acceptable excipients.
- 23. A process according to any of the preceding claims, wherein the second composition comprises one or more pharmaceutically acceptable excipients.
 - 24. A process according to any of the preceding claims, wherein the second composition comprises one or more therapeutically and/or prophylactically active substances.

25. A process according to claim 22 or 23, wherein the pharmaceutically acceptable excipient is selected from the group consisting of fillers, binders, disintegrants, glidants, colouring agents, taste-masking agents, pH-adjusting agents, solubilizing agents, stabilising agents, wetting agents, surface active agents, antioxidants etc.

5

10

20

25

- 26. A process according to claim 21 or 24, wherein the therapeutically and/or prophylactically active substance has an aqueous solubility at 25 °C and pH of 7.4 of at the most about 3 mg/ml such as, e.g., at the most about 2 mg/ml, at the most about 1 mg/ml, at the most about 750 μ g/ml, at the most about 500 μ g/ml, at the most about 250 μ g/ml, at the most about 100 μ g/ml, or at the most about 50 μ g/ml, or at the most about 25 μ g/ml, or at the most about 20 μ g/ml or or at the most about 10 μ g/ml.
- 27. A process according to any of the preceding claims, wherein the active substanceis a cosmetically active or beneficial substance or a food or nutrient substance.
 - 28. A process according to any of the preceding claims, wherein the second composition comprises magnesium aluminosilicate and/or magnesium aluminometasilicate such as, e.g, Neusilin S1, Neusilin FH2, Neusilin US2, Neusilin UFL2 or the like.
 - 29. A process according to any of the preceding claims, wherein the second composition comprises magnesium aluminosilicate and/or magnesium aluminometasilicate such as, e.g., Neusilin, and the particulate material obtained has an content of carrier of at least about 30% v/v such as, e.g, at least about 40% v/v, at least about 50% v/v, at least about 60% v/v, at least about 70% v/v, at least about 75% v/v, at least about 80% v/v, at least about 85% v/v or at least about 90% v/v.
- 30. A process according to any of the preceding claims for the preparation of a particulate material for the manufacture of a pharmaceutical, cosmetic or food composition.
 - 31. A process according to claim 30, wherein the pharmaceutical, cosmetic or food composition is in a liquid, semi-solid or solid form.

- 32. A process according to any of the preceding claims for the preparation of a particulate material suitable for use in the preparation of tablets.
- 33. A method for controlled agglomeration of a finely dispersed solid material, the method comprises subjecting the finely dispersed solid material in the form of a second composition to a process claimed in any of claims 1-32 employing a predetermined amount of carrier, whereby a particulate material having a predetermined geometric weight mean diameter is obtained.

15

20

- 34. A method for improving the bioavailability of a therapeutically and/or prophylactically active substance having an aqueous solubility at 25 °C and pH of 7.4 of at the most about 3 mg/ml, the method comprising subjecting the therapeutically and/or prophylactically active substance in a first and/or a second composition to a process claimed in any of claims 1-32.
- 35. A method for improving the shelf-life of a pharmaceutical composition which comprises an oxidation sensitive therapeutically and/or prophylactically active substance, the method comprising subjecting the therapeutically and/or prophylactically active substance in a first and/or a second composition to a process claimed in any of claims 1-32 before or during manufacture of the pharmaceutical composition.
- 36. A particulate material obtainable according to a process claimed in any of claims 1-32.
 - 37. A particulate material according to claim 36 for pharmaceutical or cosmetic use.
 - 38. A particulate material according to claims 36 or 37 for use in the preparation of a solid dosage form.
 - 39. A particulate material according to claim 36 for use in the preparation of tablets.

WO 03/004001 PCT/DK02/00472 67

- 40. A particulate material according to any of claims 36-39 coated with a coating selected from the group consisting of film coatings, modified release coatings, enteric coatings, protective coatings and anti-adhesive coatings.
- 5 41. A particulate material according to any of claims 36-40 for use in the manufacture of tablets obtained by direct compression.
 - 42. A pharmaceutical composition comprising a particulate material obtainable by a process as claimed in any of claims 1-32.
 - 43. A pharmaceutical composition according to claim 42 in the form of a fluid, semisolid or solid composition.

10

25

30

- 44. A pharmaceutical composition according to claim 42 in the form of powders, 15 tablets, capsules or sachets.
 - 45. A pharmaceutical composition according to claim 41 in the form of a liquid such as, e.g., a solution or a dispersion including an emulsion and a suspension.
- 20 46. Use of a carrier claimed in any of claims 12-21 for the preparation of a solid particulate material, which comprises at least about 25% v/v of the carrier, and which is suitable for further processing into tablets.
 - 47. A pharmaceutical particulate material obtained by mixing a first and a second composition as defined in any of claims 1-32 and heating to a temperature that is below the melting point of a carrier contained in the first composition, the particulate material having a geometric weight mean diameter d_{gw} of ≥10 µm such as, e.g. \geq 20 μ m, from about 20 to about 2000, from about 30 to about 2000, from about 50 to about 2000, from about 60 to about 2000, from about 75 to about 2000 such as, e.g. from about 100 to about 1500 μ m, from about 100 to about 1000 μ m or from about 100 to about 700 μ m, or at the most about 400 μ m or at the most 300 μ m such as, e.g., from about 50 to about 400 μ m such as, e.g., from about 50 to about 350 μ m, from about 50 to about 300 μ m, from about 50 to about 250 μ m or from about 100 to about 300 μ m; and the concentration of the carrier in the particulate material being at least about 40% v/v.

15

20

- 48. A particulate material according to claim 47 suitable for use in the preparation of solid dosage form.
- 5 49. A particulate material according to claim 47 suitable for use in the preparation of tablets.
 - 50. A particulate material according to claims 48 or 49, wherein the particulate material has sufficient properties with respect to flowability and/or anti-adhesion so that addition of e.g. a lubricant can be omitted when preparing a solid dosage form.
 - 51. A particulate material according to any of claims 47-50 comprising magnesium aluminosilicate and/or magnesium aluminometasilicate.
 - 52. Use of magnesium aluminosilicate and/or magnesium aluminometasilicate as a lubricant
 - 53. Use according to claim 52 for the preparation of pharmaceutical products.
 - 54. Use of magnesium aluminosilicate and/or magnesium aluminometasilicate as an anti-adhesive agent.
 - 55. Use according to claim 54 for the preparation of pharmaceutical products.
 - 56. Use according to any of claims 52-55, wherein magnesium aluminometasilicate is Neusilin such as Neusilin UFL2 or the like.

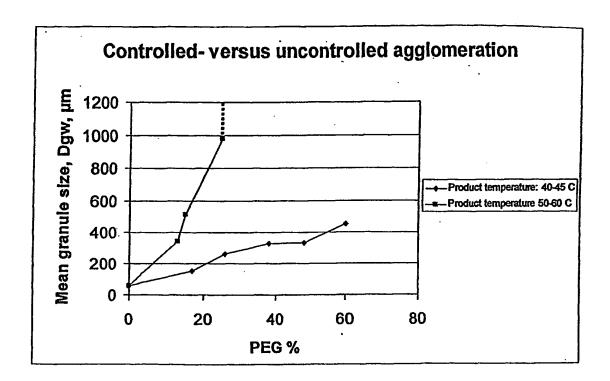


Fig. 1

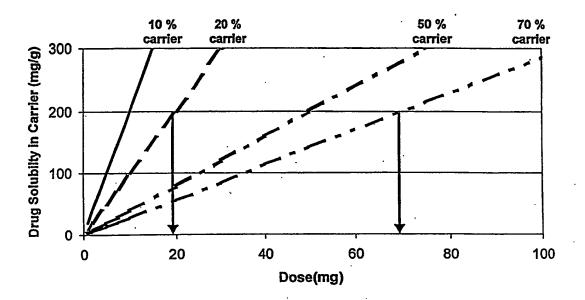


Fig. 2

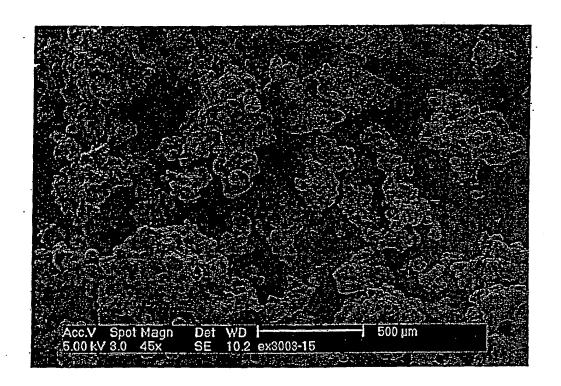


Fig. 3

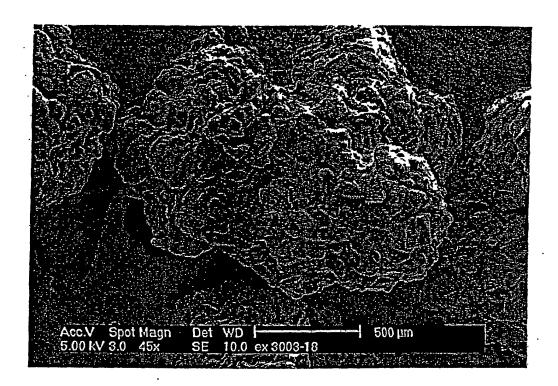


Fig. 4

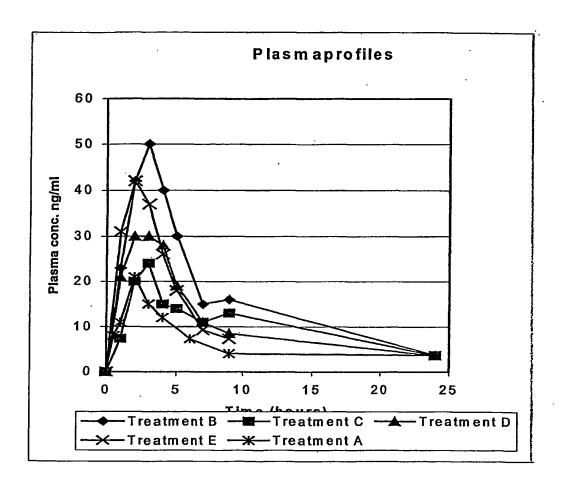


Fig. 5

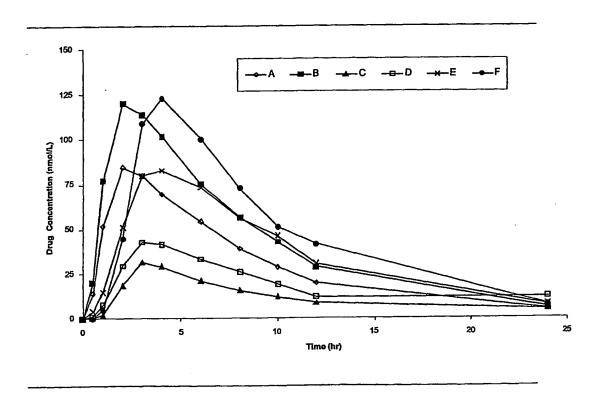


Fig. 6


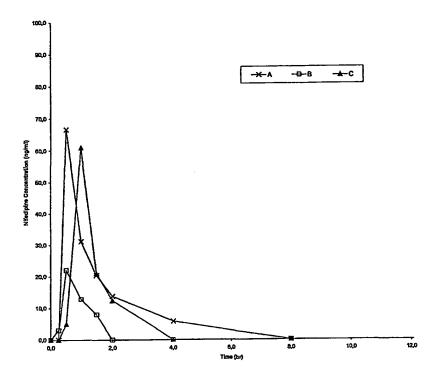


Fig. 7

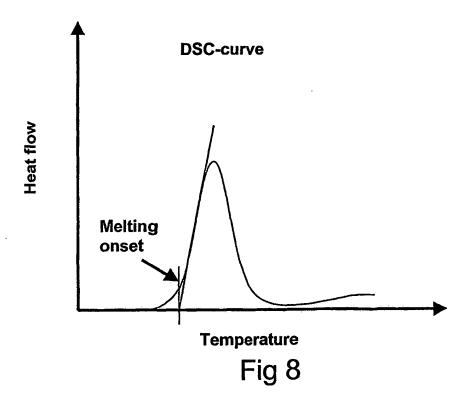

INTERNATIONAL SEARCH REPORT

national Application No PCT/DK 02/00472

A. CLASSIFICATION OF SUBJECT MATTER
1PC 7 A61K9/16 A61K9/20 B01J2/16 According to International Patent Classification (IPC) or to both national classification and IPC B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61K B01J Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practical, search terms used) WPI Data, PAJ, EPO-Internal C. DOCUMENTS CONSIDERED TO BE RELEVANT Relevant to dalm No. Cliation of document, with indication, where appropriate, of the relevant passages Category 1-4,6,7, DATABASE WPI 9-12,15, Week 8544 22,24, Derwent Publications Ltd., London, GB; 26,27, AN 1985-272864 30-33, XP002180852 35,36 & JP 60 184378 A (TAJEDA CHEM IND LTD), 19 September 1985 (1985-09-19) cited in the application abstract -/--Patent family members are listed in annex. Further documents are listed in the continuation of box C. Special categories of cited documents: T later document published after the international filing date or priority date and not in conflict with the application but called to understand the principle or theory underlying the "A" document defining the general state of the art which is not considered to be of particular relevance invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "E" earlier document but published on or after the international "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another clation or other special reason (as specified) 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled O document referring to an oral disclosure, use, exhibition or document published prior to the international filling date but later than the priority date claimed "&" document member of the same patent family Date of mailing of the international search report Date of the actual completion of the international search 04/11/2002 21 October 2002 Authorized officer Name and mailing address of the ISA European Palent Office, P.B. 5818 Patentlaam 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo ni, Fax: (+31-70) 340-3016 Benz, K

INTERNATIONAL SEARCH REPORT

inational Application No PCT/DK 02/00472

		PCT/DK 02/00472						
C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT								
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to ctaim No.						
X ·	EP 0 306 465 A (LEJUS MEDICAL AKTIEBOLAG) 8 March 1989 (1989-03-08) - cited in the application	1-4, 6-13, 15-17, 23-25, 27, 30-33, 35-46						
	page 2, line 1 -page 3, line 65 page 3, line 22 - line 24							
X	WO 01 22941 A (H. LUNDBECK A/S) 5 April 2001 (2001-04-05) cited in the application page 1, line 1 - line 8 page 10, line 16 - line 20	1-3						
Α	A. FAHAM ET AL.: "Hot melt coating technology: influence of Compritol 888 Ato and granule size on chloroquine release" PHARMAZIE, vol. 55, no. 6, June 2000 (2000-06), pages 444-448, XP000932193 Berlin (DE) the whole document page 445; table 2	1-51						
X	DE 19 30 068 A (STAHL- UND RÖHRENWERK REISHOLZ GMBH) 17 December 1970 (1970-12-17) page 2, line 6 - line 17	52						
X	DATABASE WPI Week 8303 Derwent Publications Ltd., London, GB; AN 1983-05481k XP002217469 & JP 57 195688 A (KOHJIN CO LTD), 1 December 1982 (1982-12-01) abstract	54						
·								

INTERNATIONAL SEARCH REPORT

Information on patent family members

pational Application No							
PCT/DK	02/00472						

Patent document died in search report		Publication date		Patent family member(s)	Publication date
JP 60184378	A	19-09-1985	NONE		
EP 306465	Α	08-03-1989	AT	78424 T	15-08-1992
			DE	3872991 D1	27-08-1992
			DE	3872991 T2	14-01-1993
			EP	0306465 A1	08-03-1989
			ES	2034392 T3	01-04-1993
			SE	8703360 A	01-03-1989
WO 0122941	Α	05-04-2001	AU	7405000 A	30-04-2001
,,, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	••		MO	0122941 A1	05-04-2001
			EP	1220658 A1	10-07-2002
DE 1930068	Α	17-12-1970	DE	1930068 A1	17-12-1970
JP 57195688	A	01-12-1982	NONE		

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS

IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

FADED TEXT OR DRAWING

BLURRED OR ILLEGIBLE TEXT OR DRAWING

SKEWED/SLANTED IMAGES

COLOR OR BLACK AND WHITE PHOTOGRAPHS

GRAY SCALE DOCUMENTS

LINES OR MARKS ON ORIGINAL DOCUMENT

REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

OTHER:

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.